

# **Examination of Factors Influencing Nechako River Discharge, Temperature, and Aquatic Habitats**

J.S. Macdonald, J. Morrison, D.A. Patterson, J. Heinonen,  
and M. Foreman

Fisheries and Oceans Canada  
Science Branch, Pacific Region  
Centre for Aquaculture and Environmental Research  
4160 Marine Dr.  
West Vancouver, BC  
V7N 4C1

2007

**Canadian Technical Report of  
Fisheries and Aquatic Sciences 2773**



Fisheries and Oceans  
Canada

Pêches et Océans  
Canada

Canada 

## **Canadian Technical Report of Fisheries and Aquatic Sciences**

Technical reports contain scientific and technical information that contributes to existing knowledge but which is not normally appropriate for primary literature. Technical reports are directed primarily toward a worldwide audience and have an international distribution. No restriction is placed on subject matter and the series reflects the broad interests and policies of the Department of Fisheries and Oceans, namely, fisheries and aquatic sciences.

Technical reports may be cited as full publications. The correct citation appears above the abstract of each report. Each report is abstracted in *Aquatic Sciences and Fisheries Abstracts* and indexed in the Department's annual index to scientific and technical publications.

Numbers 1 - 456 in this series were issued as Technical Reports of the Fisheries Research Board of Canada. Numbers 457 - 714 were issued as Department of the Environment, Fisheries and Marine Service Technical Reports. The current series name was changed with report number 925.

Technical reports are produced regionally but are numbered nationally. Requests for individual reports will be filled by the issuing establishment listed on the front cover and title page. Out-of-stock reports will be supplied for a fee by commercial agents.

## **Rapport technique canadien des sciences halieutiques et aquatiques**

Les rapports techniques contiennent des renseignements scientifiques et techniques qui constituent une contribution aux connaissances actuelles, mais que ne sont pas normalement appropriés pour la publication dans un journal scientifique. Les rapports techniques sont destinés essentiellement à un public international et ils sont distribués à cet échelon. Il n'y a aucune restriction quant au sujet; de fait, la série reflète la vaste gamme des intérêts et des politiques du ministère des Pêches et des Océans, c'est-à-dire les sciences halieutiques et aquatiques.

Les rapports techniques peuvent être cités comme des publications complètes. Le titre exact paraît au-dessus du résumé de chaque rapport. Les rapports techniques sont résumés dans la revue *Résumés des sciences aquatiques et halieutiques*, et ils sont classés dans l'index annuel des publications scientifiques et techniques du Ministère.

Les numéros 1 à 456 de cette série ont été publiés à titre de rapports techniques de l'Office des recherches sur les pêcheries du Canada. Les numéros 457 à 714 sont parus à titre de rapports techniques de la Direction générale de la recherche et du développement, Service des pêches et de la mer, ministère de l'Environnement. Les numéros 715 à 924 ont été publiés à titre de rapports techniques du Service des pêches et de la mer, ministère des Pêches et de l'Environnement. Le nom actuel de la série a été établi lors de la parution du numéro 925.

Les rapports techniques sont produits à l'échelon régional, mais numérotés à l'échelon national. Les demandes de rapports seront satisfaites par l'établissement auteur dont le nom figure sur la couverture et la page du titre. Les rapports épuisés seront fournis contre rétribution par des agents commerciaux.

Canadian Technical Report of  
Fisheries and Aquatic Sciences 2773

2007

EXAMINATION OF FACTORS INFLUENCING NECHAKO RIVER DISCHARGE,  
TEMPERATURE, AND AQUATIC HABITATS

by

J.S. Macdonald<sup>1</sup>, J. Morrison<sup>2</sup>, D.A. Patterson<sup>3</sup>, J. Heinonen<sup>4</sup>, and M. Foreman<sup>5</sup>

---

<sup>1</sup>Fisheries and Oceans Canada, Science Branch, Pacific Region, Centre for Aquaculture and Environmental Research, 4160 Marine Dr., West Vancouver, BC, V7N 4C1.;

<sup>2</sup>Vynx Design Inc., Sidney, BC V8L 3J2,

<sup>3</sup>Fisheries and Oceans Canada, Science Branch, Pacific Region, Simon Fraser University, School of Resource and Environmental Management, Burnaby, BC, V5A 1S6.

<sup>4</sup>Fisheries and Oceans Canada, Oceans Habitat and Enhancement, 401 Burrard St, Vancouver, V6C 3S4,

<sup>5</sup>Fisheries and Oceans Canada, Science Branch, Institute of Ocean Sciences, Sidney, BC, V8L 4B2.

© Her Majesty the Queen in Right of Canada 2007  
Cat. No. Fs97-6/2773E ISSN 0706-6457

Correct citation for this publication:

Macdonald, J.S., Morrison, J., Patterson, D.A., Heinonen, J., and Foreman, M. 2007.  
Examination of factors influencing Nechako River discharge, temperature, and  
aquatic habitats. Can. Tech. Rep. Fish. Aquat. Sci. 2773: vii + 32 p.

## TABLE OF CONTENTS

LIST OF TABLES.....	iii
LIST OF FIGURES.....	iv
ABSTRACT.....	vi
RESUMÉ.....	vii
INTRODUCTION.....	1
METHODS.....	7
Study Area.....	7
Data Collection and Sources.....	7
Data Analysis/Models.....	8
RESULTS.....	11
DISCUSSION.....	22
ACKNOWLEDGEMENTS.....	26
LITERATURE CITED.....	26

## LIST OF TABLES

Table 1: Timing of adult sockeye salmon that rely on the Nechako River at key location on the migration route (NFCP 2005) and mean percent spawning success/standard deviation (estimated as effective females on the spawning grounds) from 1938-present with the exception of the early Nadina where spawning data was not collected following the 1990 run. Early Nadina spawning success data does not consider fish that returned to the Nadina spawning channel (data courtesy of Ms. T. Cone, DFO Canada). .....	5
Table 2: Environmental databases used in this study by location, source and custodian. July and August data from 1950 to 2005 was most useful for the objectives of this MS. Most of the data were available through Water Survey of Canada (WSC), Fisheries and Oceans Canada (DFO) or Alcan Inc. In situations where there was more than one data source an ‘*’ is used to link the source to the data type. ....	8
Table 3: Results of a principle component analysis to describe the information shared among the daily mean meteorological and water release variables during a 30D period (July 20 <sup>th</sup> – August 20 <sup>th</sup> , 1981-2002) when STMP flows from Skins Lake were released in response to meteorological forecasts. The first three components described 93.6% of the database variation accounted for primarily by the variables indicated in bold. ....	13
Table 4: A table describing the results of the regression of daily Finmoore water temperature response to the effects of the variation in meteorological and Skins Lake water release variables from July 20 <sup>th</sup> – August 20 <sup>th</sup> , 1981-2002. Predictor variables were PC scores from the PCA analysis (Table 3), which are transformations of the original variable loadings (in brackets) on each component. Humidity includes variation in both solar radiation and dew point. Variation in Skins Lake water releases as described by PCIII represents water released independent of meteorological forecasts. ....	13
Table 5: Description of a model ( $\text{Finmoore } T^{\circ}\text{C} = 13.2 - 0.00331 \text{ Finmoore } Q + 0.346 \text{ PG Air } T^{\circ}\text{C}$ ), to predict daily Finmoore water temperature response to both Prince George air temperature and Finmoore water flow from July 7 <sup>th</sup> to August 30 <sup>th</sup> , 1981-2002. Predictor variables were chosen based on variable selection results described in Tables 3 and 4. ....	14

Table 6: An examination of the correlation between annual Nechako cooling power calculations at Finmoore (equation 3), and water temperature at several locations during the period they are used by the Early Stuart sockeye. Both Pearson correlation coefficients and probability values ( <i>in italics</i> ) are provided with significant correlations in bold ( $p < 0.05$ ). Availability of empirical data from some locations restricted the analysis to the years from 1981 to 1999 (Table 2). Very little temperature data were available from the Nechako below the confluence with the Stuart; therefore, Isle Pierre data was generated using the model with annual meteorological and tributary flow inputs. ....	21
---	----

## LIST OF FIGURES

Figure 1: The Nechako watershed with locations of data collection sites, salmon spawning sites and migration corridors. The Early Stuart sockeye salmon run spawns north of Stuart Lake and the Stuart River. Insert of British Columbia shows locations of Entrance Island and Hells Gate. ....	1
Figure 2: Mean daily discharge (cms) in the Nechako River at Vanderhoof during the entire year. Data spans the pre-dam, natural flow period (1950-52), the extreme low flows when the reservoir was filling (1953-1956), the pre-STMP period during initial operation when greater water volume was released but releases were variable (1957-1982), and the present situation typified by more uniform releases of moderate volumes for a 30 day period for STMP cooling purposes (1983-2003). ....	2
Figure 3: Mean daily Nechako water temperatures at Finmoore in July and August since water diversion began (1953-2000). A polynomial fit to the data has an $R^2$ of 0.9824. ....	4
Figure 4: Annual mean temperatures ( $^{\circ}\text{C}$ ) experienced by the Early Stuart sockeye since the early 1950's during their return from the open Pacific Ocean to their spawning grounds north of Stuart River (Fig. 1). Entrance Island is in the Strait of Georgia 30 km. from the mouth of the Fraser River. Hells Gate is a high gradient reach of the Fraser River approximately 200 km upstream from the river mouth. Stuart River mean temperatures are graphed with annual daily maximum temperatures indicated by individual dots. Data sources are provided in Table 2. ....	6
Figure 5: A comparison of mean annual Skins Lake water release volume (cms) and mean annual summer temperatures ( $^{\circ}\text{C}$ ) at Prince George between 1981 and 2002. Three years are indicated during which forced spills occurred beyond those needed to control summer temperature. A fourth year, 1997, is not shown ( $15.7^{\circ}\text{C} \times 284.2$ cms). The equation, p-value and 95% confidence limits are provided for a regression of all years. The $R^2$ for the relationship was 26.5% but improved to 39.6% ( $p < 0.004$ ) when years with forced spills were removed from the regression. Both 1995 and 1998 were chosen as being representative of cool and warm years respectively. ....	12
Figure 6: Predictions of mean annual water temperature ( $^{\circ}\text{C}$ ) at Finmoore in July and August from 1981 to 2002 using the regression model described in Table 5. Three Finmoore flows scenarios were considered; actual STMP flows, the actual spring base release used before the initiation of the STMP (53 cms) and the minimum SLS release during the STMP (15 cms). Flow calculations at Finmoore were modified based on a 4D lag in water release from Skins spillway. ....	14

- Figure 7: The effect of reduced flows from the Skins spillway on deviations in annual mean Nechako water temperature below the confluence of the Stuart. Reductions were based on the elimination of the STMP flows and the adoption of a baseflow release strategy of 53 cms. Deviations are calculated for the period the STMP was in effect (July 10<sup>th</sup> – August 20<sup>th</sup>) and for the briefer period, calculated annually, when Early Stuart sockeye were migrating through the Nechako system in July and early August (Table 1). ..... 15
- Figure 8: Daily summer water temperature predictions (beginning July 1<sup>st</sup>) resulting from the modelling of various indicated Kenney Dam release volume and release temperature scenarios, at four locations in the Nechako/Stuart watershed. Release volume was based on a percentage of the actual volumes released from the Skins spillway during warm (1998) and cool (1995) years. A horizontal 20°C line identifies the STMP target temperature at Finmoore and a value that approaches the biological limit for migrating salmon. The top left and right graphs are approximate representations of the actual conditions in 1995 and 1998 respectively. .... 17
- Figure 9: Daily summer water temperature predictions resulting when 53 cms of water (the current pre-operational base release from SLS) is released from Kenney Dam at 10°C. The model uses mean meteorological and tributary conditions during the past 30 years as input. The 20°C temperature target at Finmoore is indicated with a horizontal line. Historically Early Stuart sockeye can enter the Nechako during a period spanning several weeks as described by a dashed horizontal line above the x-axis (Table 1). ..... 18
- Figure 10: A model rendition of downstream temperature convergence of small quantities of water (25 cms) released at seven different temperatures from the Kenney Dam (Reach 1) and tracked by reach to the Stuart confluence (Reach 34). Input from 2 major tributaries and the temperature target site at Finmoore are indicated. Coined the “rake effect”, it is most apparent at low flows but demonstrates the tendency for cool water to warm at a greater rate than water with a temperature near thermal equilibrium regardless of volume. Reach = 5700 m. .. 19
- Figure 11: Number of days when modelled Finmoore water temperatures will exceed the STMP target of 20°C as a consequence of 28 scenarios with differing water volumes (cms) and temperatures (°C). Temperature and volume were modelled below the Cheslatta/Nechako confluence. .... 20
- Figure 12: Annual cooling power of the Nechako at Finmoore (equation 3) as a predictor of pre-spawn mortality (PSM) among Early Stuart sockeye between 1952 and 2003. Data points are identified for select years. PSM values are  $\ln+0.1$  transformed to remove the tendency for PSM to vary with the mean and to provide a linear rendition of the data. The regression equation, p-value and  $R^2$  are provided. .... 22

**ABSTRACT**

Macdonald, J.S., Morrison, J., Patterson, D.A., Heinonen, J., and Foreman, M. 2007. Examination of factors influencing Nechako River discharge, temperature, and aquatic habitats. Can. Tech. Rep. Fish. Aquat. Sci. 2773: vii + 32 p.

This report assesses temperature and flow management options in the upper and lower Nechako system with reference to the needs of resident and migratory fish species. The efficacy of an existing management scheme is considered as are the possible benefits of developing cold water release capabilities at the Kenney Dam as a means to broaden water management options. If summer temperature targets at Finmoore can be achieved while altering water release timing and volume, the broad interests of many stakeholder groups may be met without forgoing the current temperature benefits to salmon throughout the Nechako basin resulting from the current flow regime.

The goals of this manuscript can be summarized as follows:

1. To assess the success of the existing water management scheme in terms of moderating high summer water temperatures in the Nechako upstream of the Stuart confluence.
2. To consider the effects of the existing management scheme on temperatures in the Nechako downstream of the Stuart confluence and to assess the overall effect on sockeye salmon that migrate through the Nechako upstream and downstream of the Stuart confluence.
3. To introduce a model that examines the downstream consequences of possible future release scenarios if a Kenney Dam release facility were constructed.

While proposed water release facilities at Kenney Dam may have many positive environmental benefits there is a proven temperature management efficacy to maintaining the release of large volumes of water during the summer period when salmon are in the vicinity. Current temperature targets at Finmoore can be achieved with the release of smaller amounts of cooler water from Kenney Dam but may result in warmer conditions in the lower Nechako and cooler conditions in the upper Nechako compared to conditions under the current temperature management regime. Changes to the existing management protocol must be made with caution and should consider a broad range of environmental and operational factors.



## RESUMÉ

Macdonald, J.S., Morrison, J., Patterson, D.A., Heinonen, J., and Foreman, M. 2007. Examination of factors influencing Nechako River discharge, temperature, and aquatic habitats. Can. Tech. Rep. Fish. Aquat. Sci. 2773: vii + 32 p.

Ce rapport évalue les possibilités de gestion de la température et du débit dans les parties aval et amont du système Nechako en considérant les besoins des espèces de poissons y migrant. Les options offertes par un plan de gestion déjà existant sont envisagées. Développer une structure permettant le largage d'eau froide au Barrage Kenney peut élargir les possibilités de gestion et présente des avantages; ces avantages sont également pris en considération dans ce rapport. Si les objectifs de température estivale à Finmoore peuvent être atteints en modifiant le largage effectué, en terme de date et de volume, les intérêts variés des différentes parties prenantes pourraient être respectés sans renoncer aux avantages de température pour les poissons dans la partie aval du Nechako liés au régime actuel.

Les buts de ce manuscrit sont résumés ci-dessous:

1. Evaluer la capacité du plan actuel de gestion de l'eau à modérer les hautes températures de l'eau durant l'été dans le Nechako en amont de la convergence avec la rivière Stuart
2. Examiner les effets du plan actuel de gestion de l'eau sur les températures dans le Nechako en aval de la convergence avec la rivière Stuart et évaluer l'effet global sur les saumons rouges remontant le Nechako en amont et en aval de la convergence.
3. Introduire un modèle considérant les conséquences sur l'aval de différents scénarios possibles si une structure de largage était construite au Barrage Kenney.

Bien que les équipements de largage d'eau envisagés au Barrage Kenney peuvent présenter de nombreux avantages environnementaux, les largages actuels d'importants volumes d'eau pendant l'été lorsque les saumons sont à proximité ont prouvé leurs effets pour la gestion de la température. Les objectifs actuels de température à Finmoore peuvent être atteints par le largage de volumes inférieurs d'eau plus froide en provenance du Barrage Kenney; ceci pourrait résulter en des températures plus élevées dans la partie aval du Nechako et des températures plus basses dans la partie amont par rapport aux conditions de températures liées à la gestion actuelle. Les modifications éventuelles du protocole de gestion actuel doivent être faites avec précaution et devraient prendre en considération une large gamme de facteurs environnementaux et opérationnels.



## INTRODUCTION

The regulation of river flow and the impoundment of water has often been in conflict with ecological values (Ward and Stanford 1987; Dynesius and Nilsson 1994). This conflict has led to management schemes that seek mitigation strategies to allow water use development while maintaining and preserving natural values. However, after a water use plan has been adopted there have been very few case studies that have evaluated the efficacy of the plan in relation to the original objectives. Even rarer are case studies that evaluate a plan that specifies multiple objectives that include water volume and temperature, and release timing. The evaluation of a water management plan in the Nechako River watershed (Fig. 1) that was designed to moderate environmental conditions during critical periods of salmon migration provides a unique opportunity to complete such an assessment.

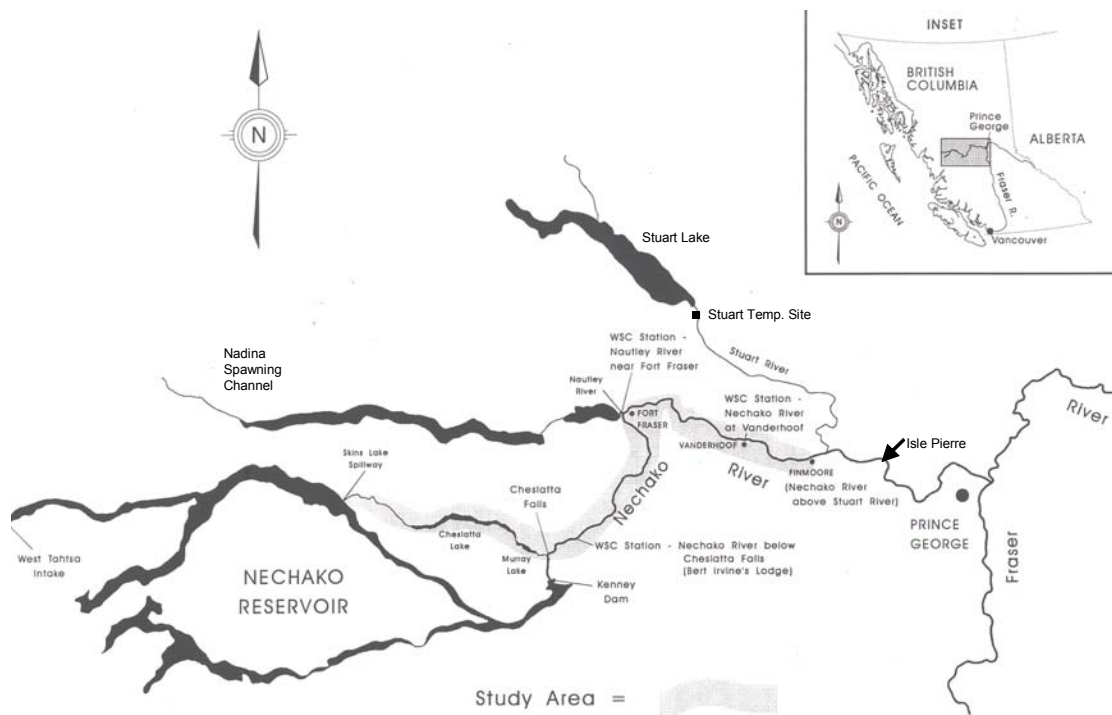


Figure 1: The Nechako watershed with locations of data collection sites, salmon spawning sites and migration corridors. The Early Stuart sockeye salmon run spawns north of Stuart Lake and the Stuart River. Insert of British Columbia shows locations of Entrance Island and Hells Gate.

In 1951, the Aluminium Company of Canada (later Alcan Inc.) began construction of the Kenney Dam in what was then known as the Grand Canyon of the Nechako River (Fig.1). The area upstream of this canyon comprised 30% of the Nechako watershed, and contained a horseshoe-shaped chain of rivers and lakes that would be flooded to form what is now known as the Nechako Reservoir. Once full, the majority of the water from this impoundment was diverted to a powerhouse at Kemano, on the other side of the Coast Mountains, via a 16 km long tunnel with an elevation drop of 792 m. During five years of construction water from the Cheslatta Lake system and other small streams provided the only flows for salmon migration, spawning and incubation in the Nechako River above the first large tributary, the Nautley River; a distance of approximately 100 km. (IPSC 1979). In 1956, when the reservoir was filled, a spillway above Skins Lake provided controlled flows from the reservoir that augmented water from the Cheslatta system (Fig. 1). Releases from the Skins Lake Spillway (SLS) were initially highly variable but would eventually be managed to provide flows for the conservation of fisheries resources in the Nechako River (Fig. 2).

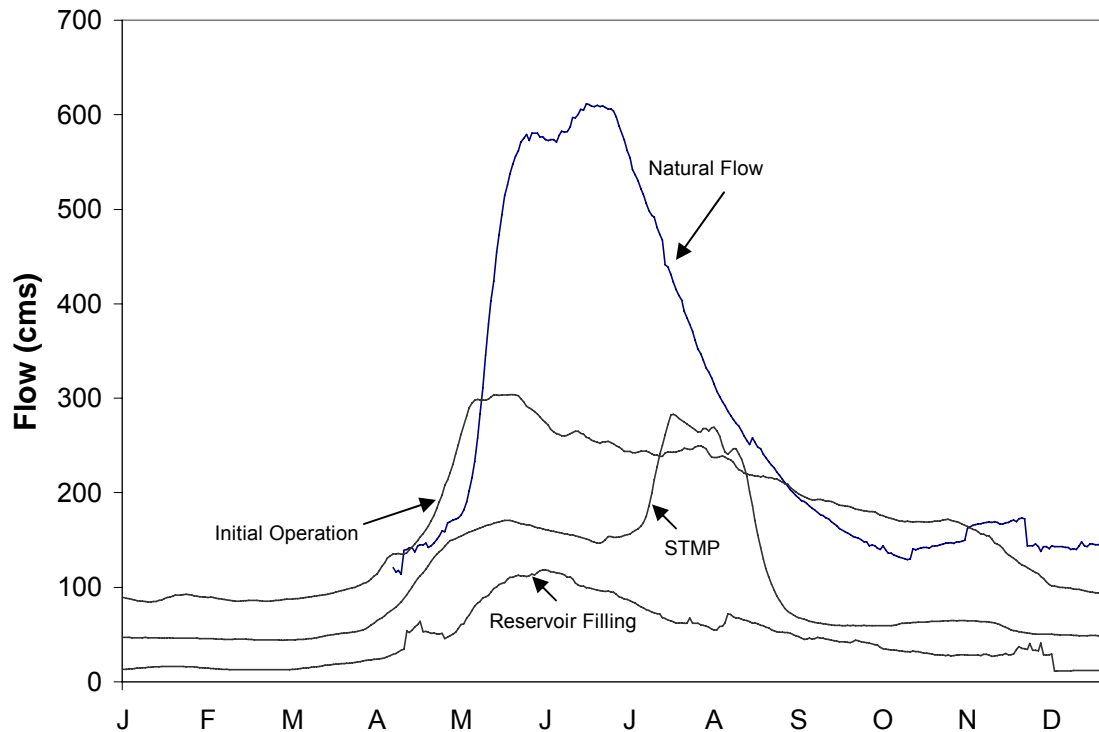


Figure 2: Mean daily discharge (cms) in the Nechako River at Vanderhoof during the entire year. Data spans the pre-dam, natural flow period (1950-52), the extreme low flows when the reservoir was filling (1953-1956), the pre-STMP period during initial operation when greater water volume was released but releases were variable (1957-1982), and the present situation typified by more uniform releases of moderate volumes for a 30 day period for STMP cooling purposes (1983-2003).

In 1980, in response to a court injunction, Alcan began releasing flows designed to protect fisheries values in the Nechako River, with a particular focus on the Nechako upstream of the confluence with the Stuart River since this area was most directly affected by flow regulation (NFCP 2005). These flows consisted of year-round minimum flow requirements for the benefit of Chinook salmon (*Oncorhynchus tshawytscha*) of approximately 30 m<sup>3</sup>/sec and summer “cooling flows” during July 10th and August 20th for the benefit of sockeye salmon (*Oncorhynchus nerka*) of approximately 158 to 213 cms, both measured at Cheslatta Falls. The cooling flows are what is now referred to as the Summer Temperature Management Program (STMP).

The STMP was developed between 1980 and 1982 and has been implemented in its current form each year since 1983, except those years when Alcan has released additional water due to reservoir management considerations. The STMP is intended to moderate potential high water temperatures in the Nechako River, with the specific goal of reducing the frequency of observed mean daily water temperatures >20°C at Finmoore, located just upstream of the confluence with the Stuart River (Fig. 1), between July 20<sup>th</sup> and August 20<sup>th</sup> (Triton 2004, NFCP 2005). This is achieved by releasing reservoir surface water through Skins Lake Spillway based on computer generated water temperature responses to anticipated meteorological conditions in the watershed between July 10<sup>th</sup> and August 20<sup>th</sup>. During the warmest period (late July, early Aug.), Skins Lake surface temperature can be very warm and once released through the Cheslatta system to the upper Nechako can approach 20°C; but summer water temperatures at Finmoore have generally been below the 20°C target and the STMP-based water releases have become an annual policy on the assumption of their efficacy (Fig. 3). Yet there has never been a formal peer reviewed examination of the effectiveness of the STMP at achieving temperature targets at Finmoore. This study addresses this shortcoming as its first goal.

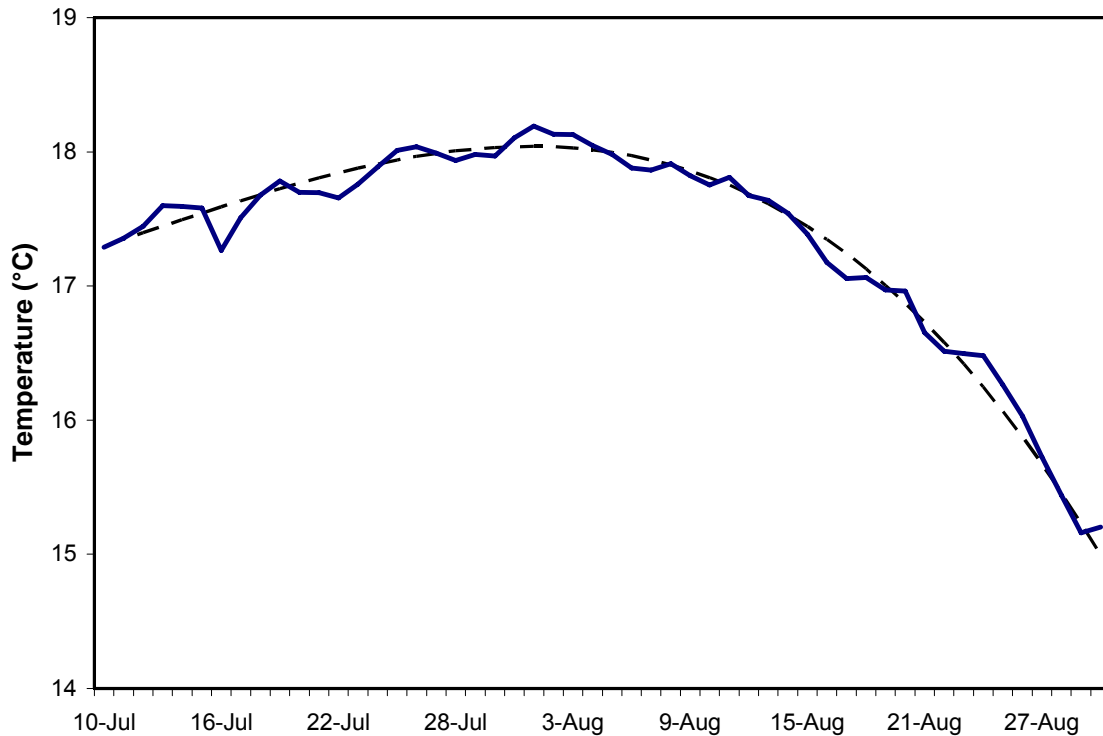


Figure 3: Mean daily Nechako water temperatures at Finmoore in July and August since water diversion began (1953-2000). A polynomial fit to the data has an  $R^2$  of 0.9824.

Flow releases from the Nechako Reservoir to the Nechako River have followed the same management regime since 1983. Studies have shown that the Chinook population, which typically spawn in the Nechako mainstem between Vanderhoof and Cheslatta Falls between August 25<sup>th</sup> and October 8<sup>th</sup>, have maintained a return strength that fluctuates within the identified target range (Hill and Irvine 2001). However, of the five runs of sockeye salmon that use the Nechako River as an adult migration corridor (Table 1), the Early Nadina, Early Stuart and Late Stuart have declined in recent years (NUSEDs, Stock Assessment, DFO). The Early Stuart and Nadina runs spend 2-6 days in the Nechako River during the warmest summer months to reach spawning grounds in the Nadina or Stuart watersheds (Fig. 1). The fish in these runs may reach the spawning grounds but fail to spawn in large numbers (Table 1)(Gilhousen 1990; Macdonald et al. 2000a). The susceptibility of returning sockeye salmon to the cumulative effect of high water temperatures during migration is well documented (Macdonald et al. 2000a and b; Hyatt et al. 2003; Cooke et al. 2004; Patterson et al. 2007a). The mid-summer temperatures of the Nechako and Stuart rivers are the warmest they will experience during their 4-5 year lifecycle (Fig. 4). When the STMP temperature target was established at Finmoore above the Stuart/Nechako confluence (Fig. 1), there was no requirement to assess its benefit to upper Fraser sockeye salmon. Its efficacy remains untested particularly in the reach below the Stuart confluence which is used in mid-summer by the Early Stuart and Early Nadina run and is excluded from the STMP target. Alteration of flow above the confluence in summer may have an undesirable effect on migration temperature below the confluence depending largely on

the relative differences in the Nechako and Stuart river conditions. The second goal of this study is to consider the effects of the STMP on temperatures in the Nechako below the confluence with the Stuart, and to assess the actual benefit of these flows to sockeye salmon that migrate through the Nechako system in the summer.

Nechako Location	Early Nadina	Late Nadina	Stellako	Early Stuart	Late Stuart
	Timing Range				
Fraser R. Confluence	July 16 - Aug 12	July 23 - Aug 18	Aug 11 - Sept 29	July 8 - Aug 7	July 31 - Sept 4
Stuart R. Confluence	July 20 - Aug 16	July 27 - Aug 23	Aug 15 - Oct 2	July 12 - Aug 11	Aug 3 - Sept 8
Nautley R. Confluence	July 22 - Aug 18	July 29 - Aug 25	Aug 18 - Oct 5	N/A	N/A
Spawning Success Mn.% / SD	90.78/14.36	94.12/9.05	91.65/10.08	89.44/11.92	95.60/13.15

Table 1: Timing of adult sockeye salmon that rely on the Nechako River at key location on the migration route (NFCP 2005) and mean percent spawning success/standard deviation (estimated as effective females on the spawning grounds) from 1938-present with the exception of the early Nadina where spawning data was not collected following the 1990 run. Early Nadina spawning success data does not consider fish that returned to the Nadina spawning channel (data courtesy of Ms. T. Cone, DFO Canada).

The recent listing of the Nechako population of white sturgeon (*Acipenser transmontanus*) to endangered status under the federal Species At Risk Act (SARA) (COSEWIC 2003) has increased the need for assurance that Nechako habitat management strategies effectively protect a wider list of biota. The white sturgeon tends to spawn on the descending limb of the hydrograph in gravel, at locations associated with floodplain habitat and sloughs that may be beneficial for incubation and larval survival (Coutant 2004; McAdam et al. 2005; Nelson, et al. 2007). Similar habitat types are frequently cited for their importance to the juvenile stages of many species of salmonids (edited reviews in Groot and Margolis 1991). The timing, shape and volume of the hydrograph and consequently these habitats, have been altered in the upper Nechako River since the advent of river regulation (HYDAT 2003, Boudreau 2004) (Fig. 2). In addition, First Nations and stakeholder groups in the watershed have expressed concern for interests other than fisheries, and have put these interests forward for consideration in the potential development of a new flow regime (eg N-DAM, Bouillon 2004).

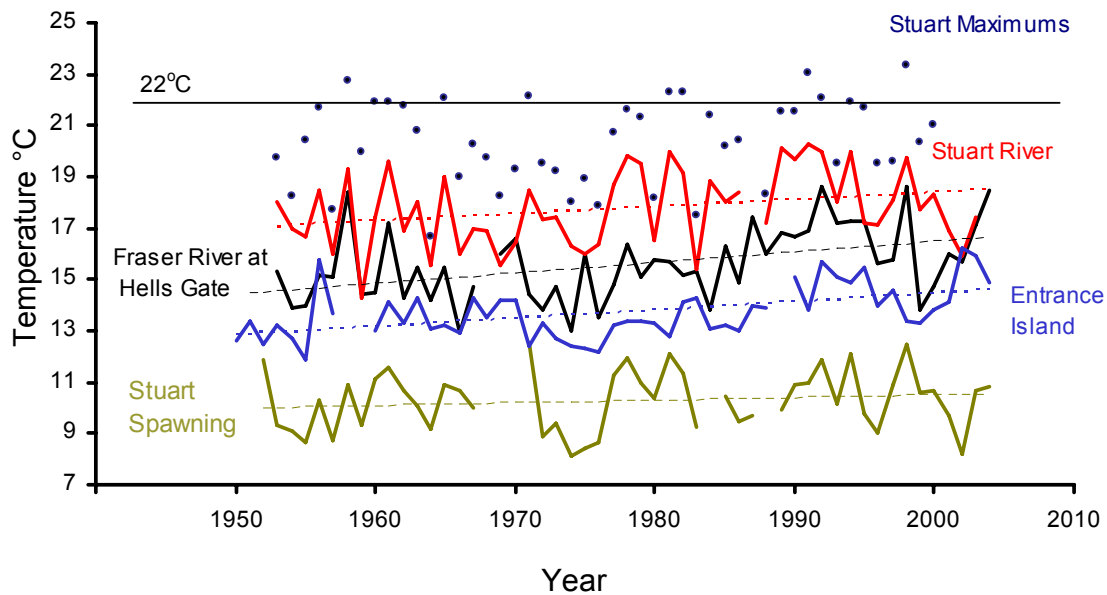


Figure 4: Annual mean temperatures ( $^{\circ}\text{C}$ ) experienced by the Early Stuart sockeye since the early 1950's during their return from the open Pacific Ocean to their spawning grounds north of Stuart River (Fig. 1). Entrance Island is in the Strait of Georgia 30 km. from the mouth of the Fraser River. Hells Gate is a high gradient reach of the Fraser River approximately 200 km upstream from the river mouth. Stuart River mean temperatures are graphed with annual daily maximum temperatures indicated by individual dots. Data sources are provided in Table 2.

It has been postulated that the return to a more naturalized hydrograph (in terms of shape rather than volume) might address some of the outstanding concerns related to fisheries and other resource values that have been impacted by flow regulation. However, the current infrastructure limits the adjustments that can be made to the existing flow regime without compromising the ability to meet downstream temperature targets. Water release temperature from the Skins Lake Spillway is currently dependent on reservoir surface temperature, but the ability to control temperature has been proposed with the construction of a deep - cold water release facility at the Kenney Dam (Fig. 1). The third goal of this study is to introduce a model that examines the downstream consequences of several possible release temperature scenarios if the Kenney Dam release facility were constructed. Existing temperature targets may be achieved with less volume of water than currently required under the STMP.

In their pursuit of possible amendments to a watershed management plan that will continue to maintain summer water temperature for salmonids but also provide water to restore a more natural hydrograph and provide more certainty for power production, Alcan, the Province of B.C. and the Canadian Federal Government have agreed to assess the efficacy and benefits of the current water management process. This report assesses the existing temperature and flow management program in the upper and lower Nechako system and alternative strategies with reference to the needs of the resident and migratory fish species. It also considers the possible benefits of developing



cold water release capabilities at the Kenney Dam as a means to broaden water management options.

## METHODS

### STUDY AREA

The Nechako River is located in the northern portion of the interior plateau of British Columbia. The Nechako and its tributaries drain an area of approximately 47,200 km<sup>2</sup> which accounts for approximately 20% of the Fraser basin, and is second only to the Thompson River watershed (24%) in this regard. Since the construction of the Kenney Dam in 1952, the Nechako River has been regulated by flows from the impoundment of five lakes (the “great Circle Chain of Lakes”) through Cheslatta Lake, River and Falls (Fig. 1). During the 275 km passage from Cheslatta Falls to join the Fraser River at Prince George, the volume of the Nechako is approximately doubled by two watersheds. First the Nautley River, draining the Fraser and Francois lakes system, and then the Stuart River, draining Stuart and associated lakes in the most northerly portion of the Fraser River watershed. The watershed is situated in the subboreal spruce biogeoclimatic zone, and during the key months of July and August has a mean precipitation of  $\approx 45$  mm and a mean air temperature of  $\approx 16$  °C (as recorded at the Vanderhoof Airport). Winter precipitation generally falls as snow which results in snow-melt generated hydrographic peaks in the late spring in the unregulated tributaries of the Nechako (Fig. 2).

### Data Collection and Sources

Examiners of the physical characteristics of the Nechako watershed have a number of data sources to choose from. The most reliable and long-term source of meteorological data (air temperature, cloud cover, solar radiation, dew point) has come from the Prince George airport. Summer water temperature and flow data have been collected from many locations throughout the watershed. Since the 1950's, water temperatures have been collected from the diversion route at the Skins Spillway and Cheslatta Lake, the Nechako River at Bert Irvine's Lodge, Vanderhoof, Finmoore, Isle Pierre and Prince George, the Nautley River and three locations on the Stuart River. Similarly, water flow data has been collected at numerous locations including at the Skins Spillway, the Nechako River at Bert Irvine's Lodge and Vanderhoof, and the Nautley and Stuart rivers. However, very few locations have been sampled continuously since the construction of the dam and almost no physical data with the exception of air temperature exists from the period before the dam was constructed. In the 1980's in coincidence with the plans to construct Kemano II, year round coverage at existing and additional locations were added to the sampling design. Almost all earlier data were collected with paper chart recorders (e.g. Wexlers) but with the advent of electronic dataloggers (e.g. Vemco etc.) data collection and management was greatly simplified. The working database for this study was selected from the plethora of available data sources based on location, consistency of collection period, and QA/QC confirmations (and occasional extrapolations) using nearby collection sites (Table 2, Fig. 1).

Location	Lat/Long	DATA TYPE			Data Source
		Water T <sup>o</sup> C	Discharge	Meteorological	
P. G. Airport	53 <sup>o</sup> 53' N 122 <sup>o</sup> 40' W	-	-	1953-2007	CMS (Station 1096450)
Stuart River	54 <sup>o</sup> 25' N 124 <sup>o</sup> 16' W	1953-2003*	1929-2007	-	WSC (Station 08JE001); *WSC(53-00); DFO(00-03)
Vanderhoof	54 <sup>o</sup> 1' N 124 <sup>o</sup> 0' W	1969-present	1915-present	1916-present	WSC (Station 08JC001); CMS (5 stations)
Finmoore	53 <sup>o</sup> 58' N 123 <sup>o</sup> 37' W	1953-present	-	-	Alcan (Triton)
Nautley River	54 <sup>o</sup> 05' N 124 <sup>o</sup> 36' W	1954-present*	1950-present	-	WSC (Station 08JB003); *DFO
Bert Irvine's (below Cheslatta Falls)	53 <sup>o</sup> 41' N 124 <sup>o</sup> 50' W	1981-present*	1980-present	-	WSC (Station 08JA017); *DFO
Upper Stuart Spwning Grd. (Forfar Crk.)	55 <sup>o</sup> 01' N 125 <sup>o</sup> 27' W	1938-present	-	-	S. Macdonald unpublished
Hells Gate	49 <sup>o</sup> 50' N 121 <sup>o</sup> 26' W	1941-present	-	-	Patterson et al. 2007b
Entrance Island	49 <sup>o</sup> 12' N 123 <sup>o</sup> 49' W	1950-2005	-	-	R. Thompson DFO, IOS, Sidney, B.C.

Table 2: Environmental databases used in this study by location, source and custodian. July and August data from 1950 to 2005 was most useful for the objectives of this MS. Most of the data were available through Water Survey of Canada (WSC), Fisheries and Oceans Canada (DFO) or Alcan Inc. In situations where there was more than one data source an "\*" is used to link the source to the data type.

### DATA ANALYSIS/MODELS

The current strategy of increasing flows in response to predicted warming trends assumes that the water temperature at Finmoore is a function of both meteorological conditions in the Nechako watershed and the volume of water released at the ambient temperature, from the surface of the Nechako reservoir. A regression of the daily Finmoore water temperature response to all potential and available predictors, including meteorological variables (i.e. daily mean air temperature, solar radiation and dew point) and the mean daily water released from the Skins Lake Spillway (SLS), is a test of this assumption. However, considering that SLS water releases are frequently based on anticipated meteorological conditions, the predictor variables in this model are very likely to be correlated thus violating a statistical assumption of regression (Draper and Smith 1981); an assumption that is particularly important when judging the significance of individual variables (Green 1979). The potential for correlation among predictor variables was examined with a principle components analysis (PCA) for the years 1981-

2002 during the STMP period (July 20<sup>th</sup> to August 20<sup>th</sup>). A regression using the resulting PCA scores, which are uncorrelated transformations of the original predictor variables, avoids the statistical violation (Green 1979) and provides a test of the efficacy of the current STMP policy:

$$T_{Finmoore} = a + b_1 PCI + b_2 PCII + b_3 PCIII \quad (1)$$

Strength of the variable loadings on principle components combined with the regression results provided a measure of the relative influence of each original variable on Finmoore water temperature. For the analysis the Skins spillway flow variable was lagged by four days to account for the travel time of water between Skins Lake and Finmoore in the summer. The lag calculation was confirmed with a temporal analysis of the correlation between upper and lower watershed water volumes. Subsequently, a regression model was developed to predict daily Finmoore water temperatures associated with a variety of possible Skins flow management regimes based on the original predictors that were chosen as influential in the preceding analysis.

Predictions of daily water temperature downstream of Finmoore, below the confluence of the Nechako and the Stuart rivers, were based on a simple mixing model that combined the effects of water temperature ( $T$  °C) and volume ( $V$ ) of both systems:

$$T_{below\ confluence} = (V_{Finmoore} T_{Finmoore} + T_{Stuart} V_{Stuart}) / V_{below\ confluence} \quad (2)$$

If we assume that 22°C is a critical temperature beyond which migrating sockeye salmon can not endure (Brett 1952), and avoid (Hyatt et al. 2003, Quinn et al. 1997), an estimate of the ability of a volume ( $V$ ) of water at Finmoore with a temperature ( $T$  °C) to cool a warmer downstream reach is its cooling power (CPwr):

$$CPwr = V_{Finmoore} (22 - T_{Finmoore}) \quad (3)$$

Cooling power declines with declining water volume and/or increased temperature and only provides a cooling effect to migrating salmon in the lower Nechako if the summer water temperatures tend to be warmer in the Stuart River than in the Nechako River at Finmoore; an assumption that we test for the years 1982 – 2002. The annual cooling power of the Nechako River at Finmoore during the period Early Stuart sockeye salmon were estimated to be migrating through the lower Nechako, was examined for its efficacy as a predictor (and cause) of their pre-spawn losses on the spawning grounds (DFO Stock Assessment Kamloops unpublished data). Data for this analysis is available from the early 1950's. This approach provided a solution to two problems. First, it allowed us to use temperature data from a stretch of the river that while not used by Early Stuart fish, was the downstream extent of temperature regulation targets and most influenced by the flow regulation. Secondly, a similar analysis using Nechako temperature from below the Stuart confluence, a reach actually used by these fish, was restricted by lack of pre-1981 temperature data.

The construction of a water release facility at the Kenney Dam would create the opportunity to not only control water volume but also control water release temperature. At the outset of this analysis, a facility that controlled river temperature appeared to improve summer water management options by allowing existing downstream

temperature targets to be achieved while reducing water demand. However, before considering construction, an analysis of the influence of both release water volume and release water temperature on river temperature downstream was conducted. Retrospective regression models based on empirical (historic) data are inadequate for this task, but a theoretical approach developed by Foreman et al. (1997) (Institute of Ocean Sciences River Temperature Model - IOSRTM), has proven adept at providing 10 day river temperature forecasts of the Fraser River during the salmon migration season and has been in continuous use for that purpose since 1996 (Macdonald et al. 2000a; Morrison 2005). It divides a river and its tributaries into many reaches within which hourly volumes and velocities are estimated with a routing model, for subsequent use in a model to estimate hourly temperature based on the following energy balance calculation:

$$E_{\Delta} = E_{flowin} + E_{atm} - E_{flowout} \quad (4)$$

$E_{flowin}$  represents the energy in the water flowing into a reach from both the mainstem and any tributaries.

$E_{flowout}$  represents the energy in the water flowing out of the reach.

$E_{atm}$  represents the heat exchange with the atmosphere and is calculated using air temperature, dew point temperature, wind speed, cloud cover, and solar radiation.

Foreman et.al (1997) based the original model on the work of Edinger et.al (1968) and Wunderlich (1972). The version of the model used in this study was modified slightly as a result of a sensitivity analysis of model parameters (Morrison and Foreman 1998) and was set up to run from the Kenney Dam with a cold water release (CWR) to the confluence of the Stuart River near Finmoore. It consisted of 34 reaches, each being 5700m long, with two tributaries, the Cheslatta at reach 2 and the Nautley at reach 16. The validation runs that used observed flows and temperatures were run between the Cheslatta and Finmoore while other scenarios were run starting at the proposed CWR.

In total over a thousand simulations were run in four broad categories. The first and smallest group involved annual validation runs for 18 years using observed historic flows and temperatures from Cheslatta and the Nautley rivers, and corresponding daily atmospheric conditions to verify that the model could reproduce the observed average daily river temperatures at Finmoore. The next group of runs incorporated the atmospheric and tributary conditions in 1995 and 1998. The flow regime in the Cheslatta River was fixed at 15cms with the temperature set to the temperature observations from the Nautley River. Volumes from the CWR made up 50 to 100% of the actual water released in these years. Release temperature was held constant while combinations of flow at selected temperatures (from 10 to 18 °C) were chosen for their ability to deliver water to Finmoore at temperatures approaching 20 °C.

A third group of runs were used to exemplify the difficulties associated with using lower release water temperature to compensate for the effects of reduced flow on downstream temperatures. For maximum effect, combined water volume from both Cheslatta and Kenney releases was held constant at 53 cms, which was a compromise between the minimum seasonal flows set out in an agreement between Alcan and the governments and the actual summer flows experienced since 1981. The release temperature was

10°C. The model used 30 year mean tributary volumes and temperatures, and atmospheric data.

A final set of model runs was designed to assist with water release decision making by estimating the number of days that STMP temperature targets would be exceeded if specific water quantities and temperatures were released immediately below the Cheslatta/Nechako confluence. A total of 28 flow and temperature scenarios were examined beginning at 56.6 cms, 75 cms and increments of 25 cms up to 200 cms. Temperatures were 12, 14, 16 and 18°C. Daily atmospheric and tributary model inputs were based, not on a single year, but on model runs with conditions observed each year between 1981 and 1999. The mean number of days temperature exceeding 20°C at Finmoore in this period were plotted for each of the 28 temperature/flow scenarios.

## RESULTS

Since 1981, water volume released from the Skins Lake spillway during the STMP period has been larger during warm summers, as estimated from air temperature at the Prince George airport (Fig. 5). However, this relationship is weakened as a result of several years during which above average snow pack volumes during the previous winter/spring necessitated summer forced spills for dam safety reasons, unrelated to summer temperature (e.g. 1997, Macdonald 2000b, 1985, 1992, 1996, NFCP 2005). From this relationship 1995 and 1998 were chosen as being particularly cool or warm years when relatively minor or major STMP release responses occurred respectively.

Over 90% of the variation among the predictor variables is described by the first three principle components, with the meteorological variation (PCI and II) providing the greatest amount of the information in the environmental matrix (Table 3). The correlation between daily flow from the Skins facility and the meteorological variables, albeit weak, is confirmed by the variable loadings on the first principle component (PC1) of the PCA. This suggests that the summer operation of the Skins spillway is based on functional five day meteorological forecasts that promote the release of water as conditions become warmer. The variation in PCI, largely associated with air temperature, has the greatest influence on Finmoore water temperature ( $p < 0.01$ , Table 4). However, the variation in Skins spillway flow not associated with meteorological conditions (PCIII at 24 % of the variation), had a significant influence on Finmoore water temperature that was second only to air temperature ( $p < 0.01$ , Table 4). This provides credence to the efficacy of the STMP protocol. High humidity during days with reduced solar radiation (PCII) has an influence on Finmoore water temperature (Table 4) through reduced evaporative energy loss.

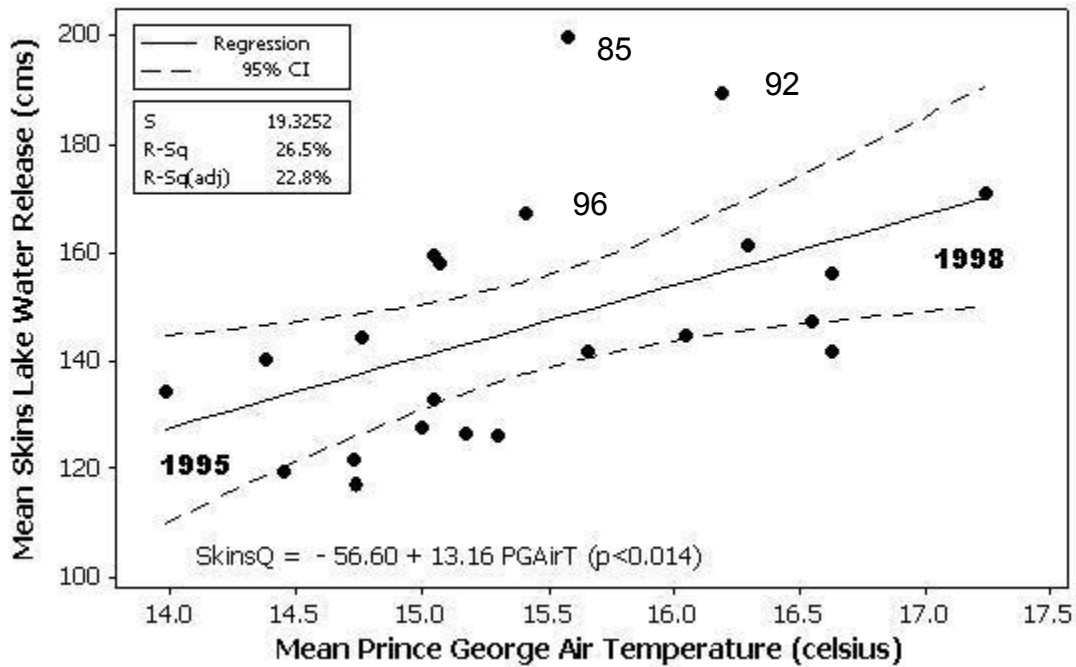


Figure 5: A comparison of mean annual Skins Lake water release volume (cms) and mean annual summer temperatures ( $^{\circ}\text{C}$ ) at Prince George between 1981 and 2002. Three years are indicated during which forced spills occurred beyond those needed to control summer temperature. A fourth year, 1997, is not shown ( $15.7^{\circ}\text{C} \times 284.2$  cms). The equation, p-value and 95% confidence limits are provided for a regression of all years. The  $R^2$  for the relationship was 26.5% but improved to 39.6% ( $p < 0.004$ ) when years with forced spills were removed from the regression. Both 1995 and 1998 were chosen as being representative of cool and warm years respectively.

Variable	PCI	PCII	PCIII	PCIV
<b>Skins 4.0</b>	0.225	-0.191	<b>0.954</b>	0.051
<b>PG Air Temp</b>	<b>0.735</b>	-0.001	-0.138	-0.664
<b>PG Humidity</b>	0.401	<b>-0.721</b>	-0.265	0.500
<b>PG Solar Radiation</b>	0.498	0.667	-0.014	0.554
<b>Proportion</b>	0.402	0.294	0.240	0.064

Table 3: Results of a principle component analysis to describe the information shared among the daily mean meteorological and water release variables during a 30D period (July 20<sup>th</sup> – August 20<sup>th</sup>, 1981-2002) when STMP flows from Skins Lake were released in response to meteorological forecasts. The first three components described 93.6% of the database variation accounted for primarily by the variables indicated in bold.

Predictor	Coefficient	T-Value	Probability	R <sup>2</sup>	N
<b>Constant</b>	18.0	368.78	0.000	40.5%	629
<b>PCI (Air Temp °C)</b>	0.792	20.19	0.000		
<b>PCII (Humidity)</b>	0.0923	2.11	0.035		
<b>PCIII (Skins Lake Q)</b>	-0.193	-3.96	0.000		

Table 4: A table describing the results of the regression of daily Finmoore water temperature response to the effects of the variation in meteorological and Skins Lake water release variables from July 20<sup>th</sup> – August 20<sup>th</sup>, 1981-2002. Predictor variables were PC scores from the PCA analysis (Table 3), which are transformations of the original variable loadings (in brackets) on each component. Humidity includes variation in both solar radiation and dew point. Variation in Skins Lake water releases as described by PCIII represents water released independent of meteorological forecasts.

Based on these results, both air temperature and water discharge were proposed as predictor variables to model Finmoore daily mean water temperatures during specific summers (Table 5). Daily Skins flow when subtracted from Finmoore flow with a four day lag, became the discharge predictor which was used with the observed daily air temperatures to estimate Finmoore water temperature to mimic scenarios where STMP flows were reduced or eliminated (Fig. 6). Humidity was omitted to simplify the model. Modification of the Finmoore water discharge predictor to reflect a water release reduction at Skins to 53 cms (spring base release) and 15 cms (minimum release during the STMP period) resulted in an annual mean increase in water temperature at Finmoore of 0.38 °C (range<sub>81-02</sub> = 0.22-0.85 °C) and 0.51 °C (range<sub>81-02</sub> = 0.34-0.97 °C) respectively. With these reduced water volumes, annual mean summer temperature predictions remained below 20°C in the Nechako above the confluence with the Stuart River. However, below the confluence, temperature increased with the imposed water reductions since Stuart temperature was higher than the Nechako during most summers (Fig. 7). Increases in the lower Nechako River of 0.5–1.0 °C were predicted, particularly during the three week period centred on annual peak migration of Early Stuart sockeye through this portion of the Fraser watershed.

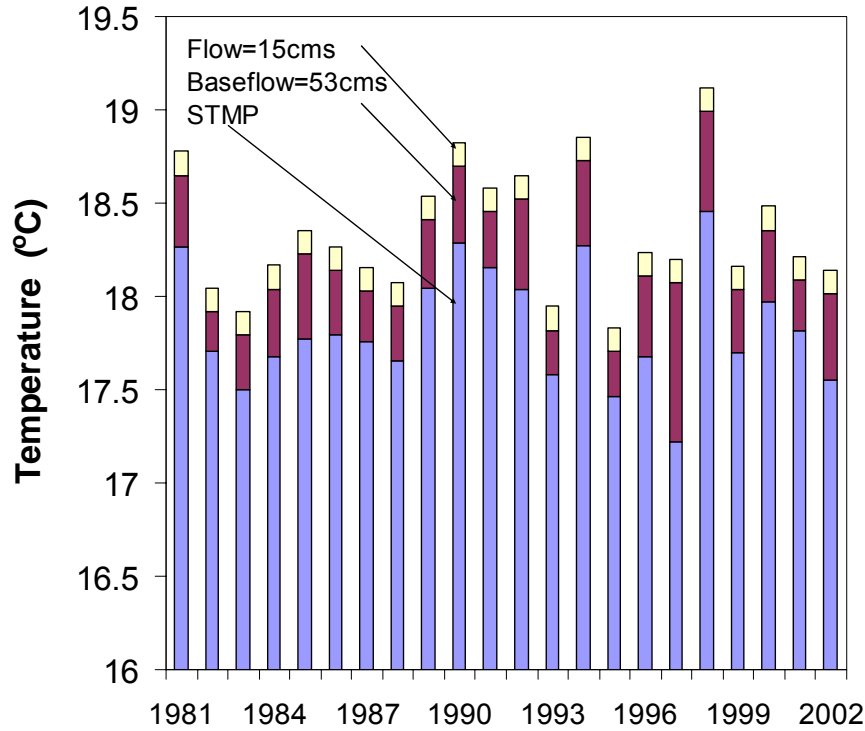


Figure 6: Predictions of mean annual water temperature ( $^{\circ}\text{C}$ ) at Finmoore in July and August from 1981 to 2002 using the regression model described in Table 5. Three Finmoore flows scenarios were considered; actual STMP flows, the actual spring base release used before the initiation of the STMP (53 cms) and the minimum SLS release during the STMP (15 cms). Flow calculations at Finmoore were modified based on a 4D lag in water release from Skins spillway.

Predictor	Coefficient	T-Value	Probability	N
Constant	13.2	59.57	0.000	1097
Finmoore Q	-0.00331	-7.15	0.000	
Air Temp $^{\circ}\text{C}$	0.346	25.36	0.000	

Table 5: Description of a model ( $\text{Finmoore } T^{\circ}\text{C} = 13.2 - 0.00331 \text{ Finmoore Q} + 0.346 \text{ PG Air } T^{\circ}\text{C}$ ), to predict daily Finmoore water temperature response to both Prince George air temperature and Finmoore water flow from July 7<sup>th</sup> to August 30<sup>th</sup>, 1981-2002. Predictor variables were chosen based on variable selection results described in Tables 3 and 4.

When the theoretical model was run initially using observed conditions for validation purposes the mean and RMS error were estimated to be -0.20 and 1.05 respectively ( $n=18$ ). The negative mean error indicated a tendency of the model to produce temperature estimates at Finmoore that were cooler than those actually observed.



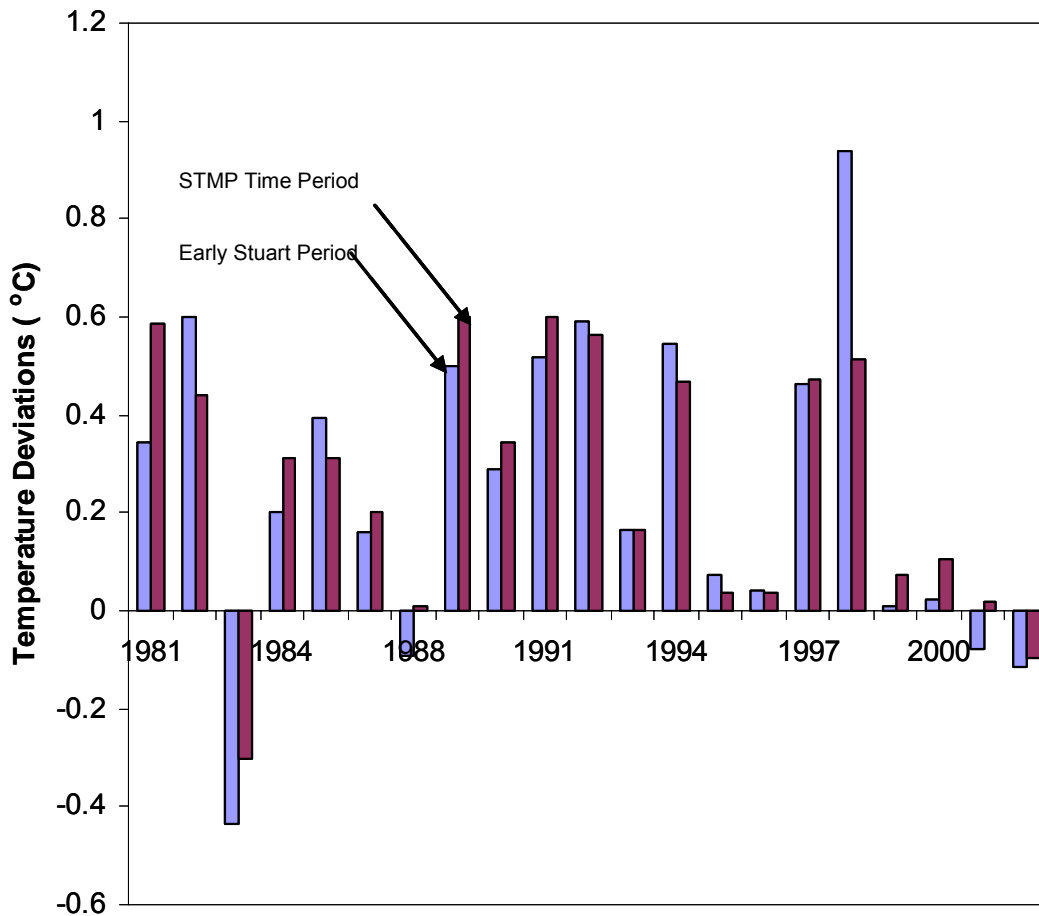


Figure 7: The effect of reduced flows from the Skins spillway on deviations in annual mean Nechako water temperature below the confluence of the Stuart. Reductions were based on the elimination of the STMP flows and the adoption of a baseflow release strategy of 53 cms. Deviations are calculated for the period the STMP was in effect (July 10<sup>th</sup> – August 20<sup>th</sup>) and for the briefer period, calculated annually, when Early Stuart sockeye were migrating through the Nechako system in July and early August (Table 1).

The actual atmospheric and tributary conditions ranged from cool (i.e 1995) to warm (i.e 1998) with minor to major STMP responses respectively (Fig. 5). Release scenarios run with the conditions experienced during these years, while simulating temperatures and volumes from a re-engineered outlet at Kenney Dam that ranged from 10 - 18°C and 50 – 100% of the actual 1995 and 1998 water releases, were able to deliver water to Finmoore at temperatures that approached but rarely exceeded the 20°C target (Fig. 8). When the model was run to mimic actual release conditions (100% flow @ 18°C) and meteorology in 1998, temperature at Finmoore exceeded 20°C on one day in August. Reducing release temperature by 3°C, to 15°C had the greatest influence in the upper Nechako (above the confluence with the Nautley River), but also caused modest cooling at Finmoore. At 15°C, the amount of water released could be reduced by 20% without exceeding the 20°C target at Finmoore, but after mixing with the warmer Stuart River water, temperature in the lower Nechako River exceeded 20°C on 3 occasions, as it did

when 100% was released at 18°C. Further reduction of both flow and temperature (50% flow @ 10°C) created yet cooler flows in the upper Nechako River, but provided only modest reductions above and below the Stuart confluence and caused the temperature to exceed 20°C at both locations on one occasion. A similar pattern was predicted from flow and temperature manipulations of the cooler conditions experienced in 1995; a reduction in release temperature when accompanied with a reduction in flow failed to provide large temperature benefits in the Nechako River above and below the confluence of the Stuart River. In fact, temperatures increased in all of the 1995 scenarios.

If modelled using 30 year mean tributary inflow volumes and temperatures, and atmospheric data, a minimum base flow (53 cms) released at an extreme low temperature (10°C) will create much lower temperatures in the upper Nechako, ensure achievement of the 20°C target above the Stuart confluence, but will not be of an adequate volume to moderate Stuart River temperatures or promote conditions conducive to salmon migration in the lower Nechako River (Fig. 9). In fact, in comparison to the temporal patterns of thermographs in other model runs (e.g. Fig. 8), the lower Nechako River thermograph was less responsive to the effects of the upper and mid-Nechako reaches during base flow, and more responsive to conditions in the Stuart River. This uncoupling of the lower river from upstream events as water volume declines, is caused by the tendency for small water volumes to be more greatly affected by the atmospheric inputs listed in the model (e.g. solar radiation and air temperature) than large volumes. The influence of atmospheric inputs becomes relatively larger as river volume declines. Consequentially, regardless of the temperature of water released in the upper reaches of the Nechako River, near equilibrium conditions will occur a few days later when the water reaches the confluence with the Stuart River (Fig. 10) unless considerably more than base flow levels are released.

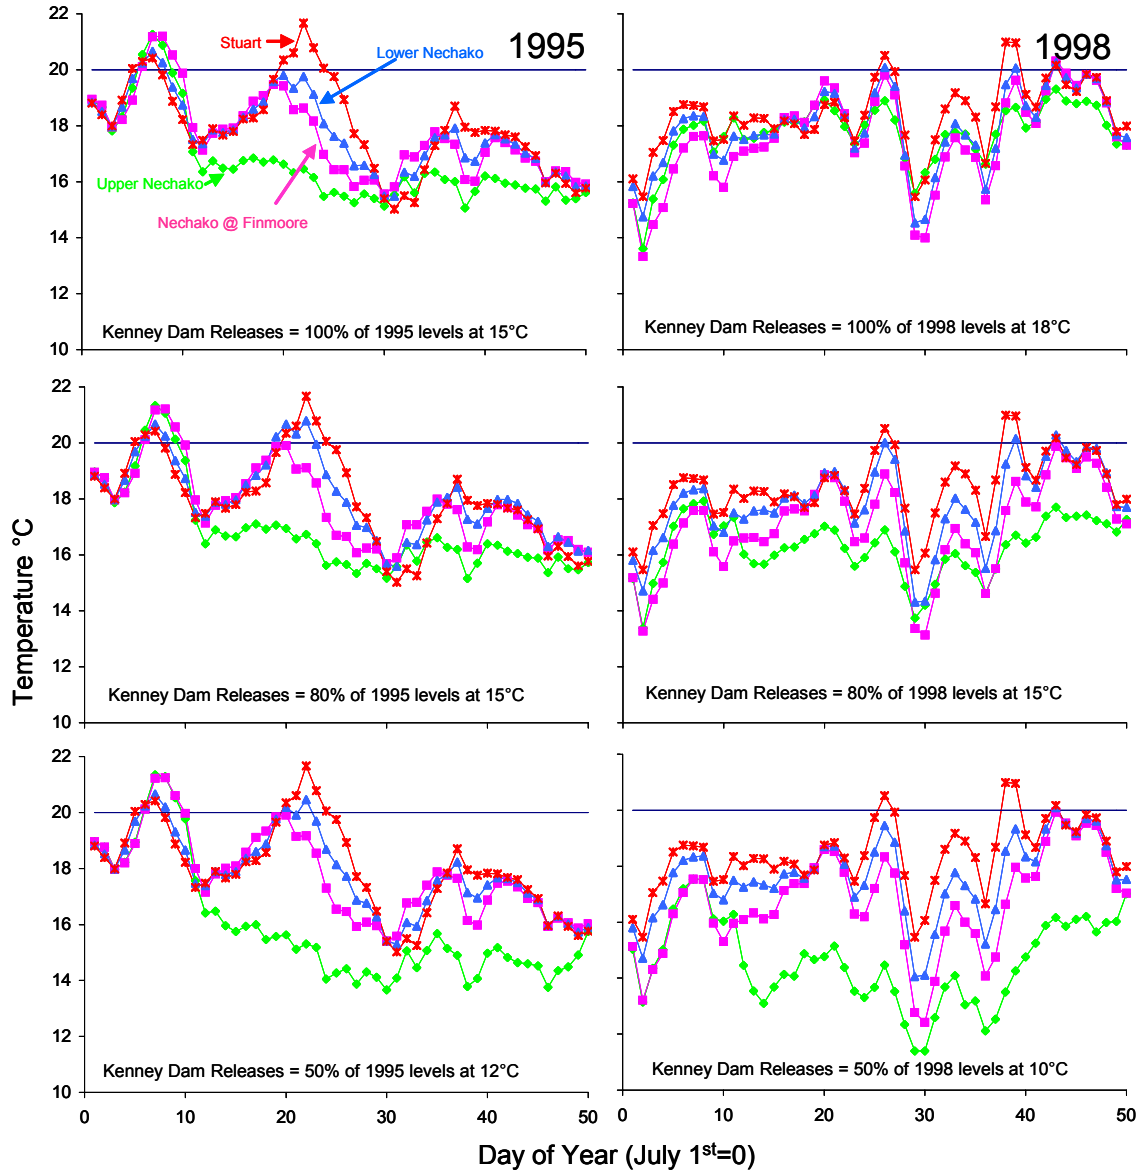


Figure 8: Daily summer water temperature predictions (beginning July 1<sup>st</sup>) resulting from the modelling of various indicated Kenney Dam release volume and release temperature scenarios, at four locations in the Nechako/Stuart watershed. Release volume was based on a percentage of the actual volumes released from the Skins spillway during warm (1998) and cool (1995) years. A horizontal 20°C line identifies the STMP target temperature at Finmoore and a value that approaches the biological limit for migrating salmon. The top left and right graphs are approximate representations of the actual conditions in 1995 and 1998 respectively.

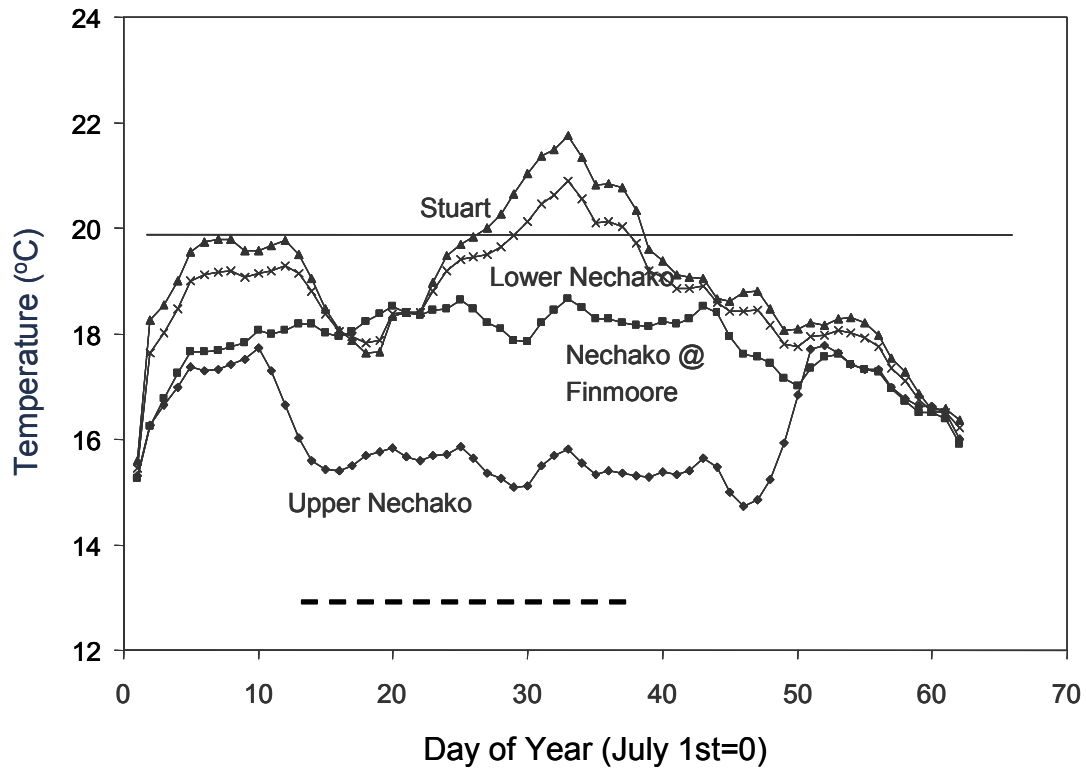


Figure 9: Daily summer water temperature predictions resulting when 53 cms of water (the current pre-operational base release from SLS) is released from Kenney Dam at 10°C. The model uses mean meteorological and tributary conditions during the past 30 years as input. The 20°C temperature target at Finmoore is indicated with a horizontal line. Historically Early Stuart sockeye can enter the Nechako during a period spanning several weeks as described by a dashed horizontal line above the x-axis (Table 1).

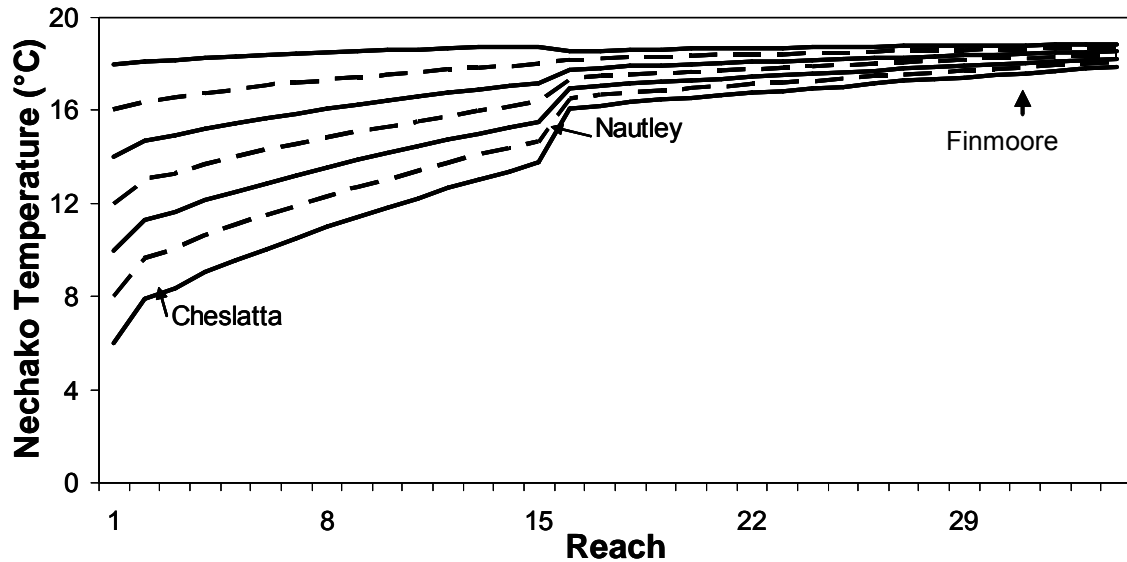


Figure 10: A model rendition of downstream temperature convergence of small quantities of water (25 cms) released at seven different temperatures from the Kenney Dam (Reach 1) and tracked by reach to the Stuart confluence (Reach 34). Input from 2 major tributaries and the temperature target site at Finmoore are indicated. Coined the “rake effect”, it is most apparent at low flows but demonstrates the tendency for cool water to warm at a greater rate than water with a temperature near thermal equilibrium regardless of volume. Reach = 5700 m.

If we expect water release operation decisions to achieve the Finmoore temperature target 95% of the time during the STMP period (28.5 days out of 30), 100 cms of water released at the Cheslatta/Nechako confluence at 12°C will achieve the Finmoore temperature target (Fig. 11). A release of 150cms at a release temperature of 14°C will also succeed. However, if 16°C water is released at 200 cms, temperature requirements are not always met and at 18°C the requirement will be met less than half the time. This analysis did not consider temperature elevation in the Nechako below the confluence with the Stuart that is likely to occur as water flow at Finmoore is reduced (Fig. 7).

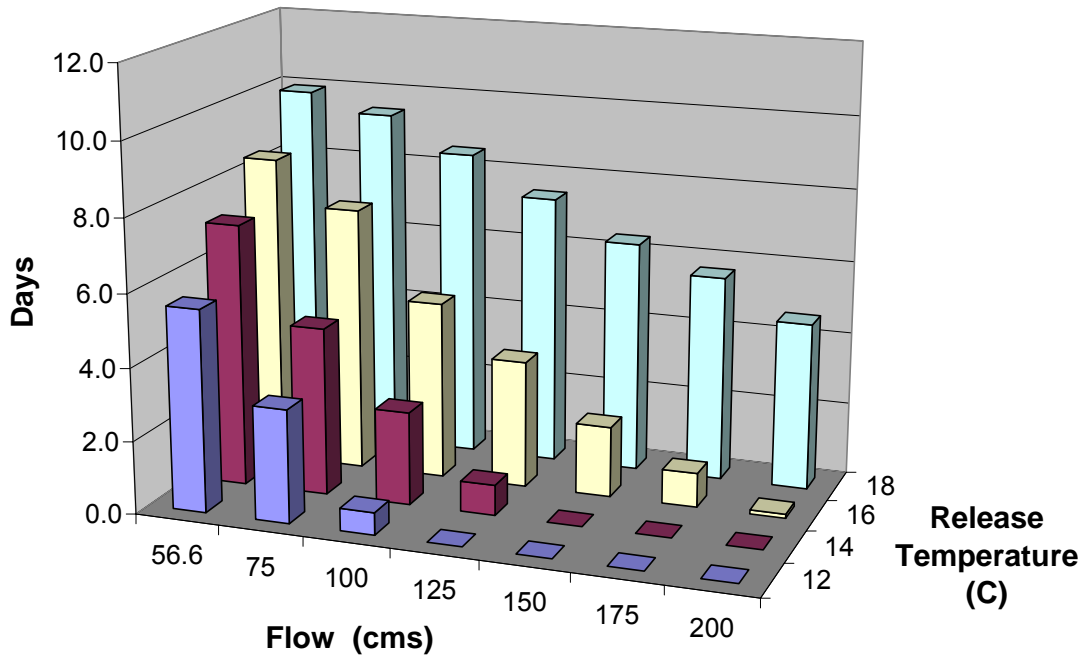


Figure 11: Number of days when modelled Finmoore water temperatures will exceed the STMP target of 20°C as a consequence of 28 scenarios with differing water volumes (cms) and temperatures (°C). Temperature and volume were modelled below the Cheslatta/Nechako confluence.

Cooling power as calculated at Finmoore, can be used to predict annual Early Stuart sockeye pre-spawn losses ( $\ln\text{PSM} + 0.1$ ,  $p < 0.05$ ) (Fig. 12). Years with cooler summer temperature (e.g. 1995, Fig. 5) had greater cooling power and subsequent lower PSM than warmer years (e.g. 1998). This relationship provides a mechanism to equate the influence of water temperature management schemes to migration habitat quality and sockeye fitness further downstream, despite only a portion of the river being used for migration. It does not necessarily imply a causal relationship as cooling power may be a surrogate for temperatures in proximate rivers and/or other habitat qualities (e.g. Stuart and lower Nechako rivers), to which the fish are directly exposed ( $p < 0.05$ , Table 6).

	Cooling Pwr.	Stuart Temperature	Spawning Grd. Temp.	Entrance Isl. Temp.	Nechako @ Isle Pierre
<b>Stuart Temperature</b>	<b>-0.472</b> <i>0.048</i>				
<b>Spawning Grd. Temp.</b>	-0.345 <i>0.175</i>	<b>0.732</b> <i>0.001</i>			
<b>Entrance Isl.Temp.</b>	0.156 <i>0.537</i>	0.053 <i>0.840</i>	0.005 <i>0.986</i>		
<b>Nechako @ Isle Pierre</b>	<b>-0.706</b> <i>0.001</i>	<b>0.893</b> <i>0.000</i>	<b>0.759</b> <i>0.001</i>	-0.036 <i>0.891</i>	
<b>Hells Gate Temperature</b>	-0.160 <i>0.512</i>	<b>0.493</b> <i>0.038</i>	0.397 <i>0.114</i>	<b>0.560</b> <i>0.016</i>	0.426 <i>0.078</i>

Table 6: An examination of the correlation between annual Nechako cooling power calculations at Finmoore (equation 3), and water temperature at several locations during the period they are used by the Early Stuart sockeye. Both Pearson correlation coefficients and probability values (*in italics*) are provided with significant correlations in bold ( $p < 0.05$ ). Availability of empirical data from some locations restricted the analysis to the years from 1981 to 1999 (Table 2). Very little temperature data were available from the Nechako below the confluence with the Stuart; therefore, Isle Pierre data was generated using the model with annual meteorological and tributary flow inputs.

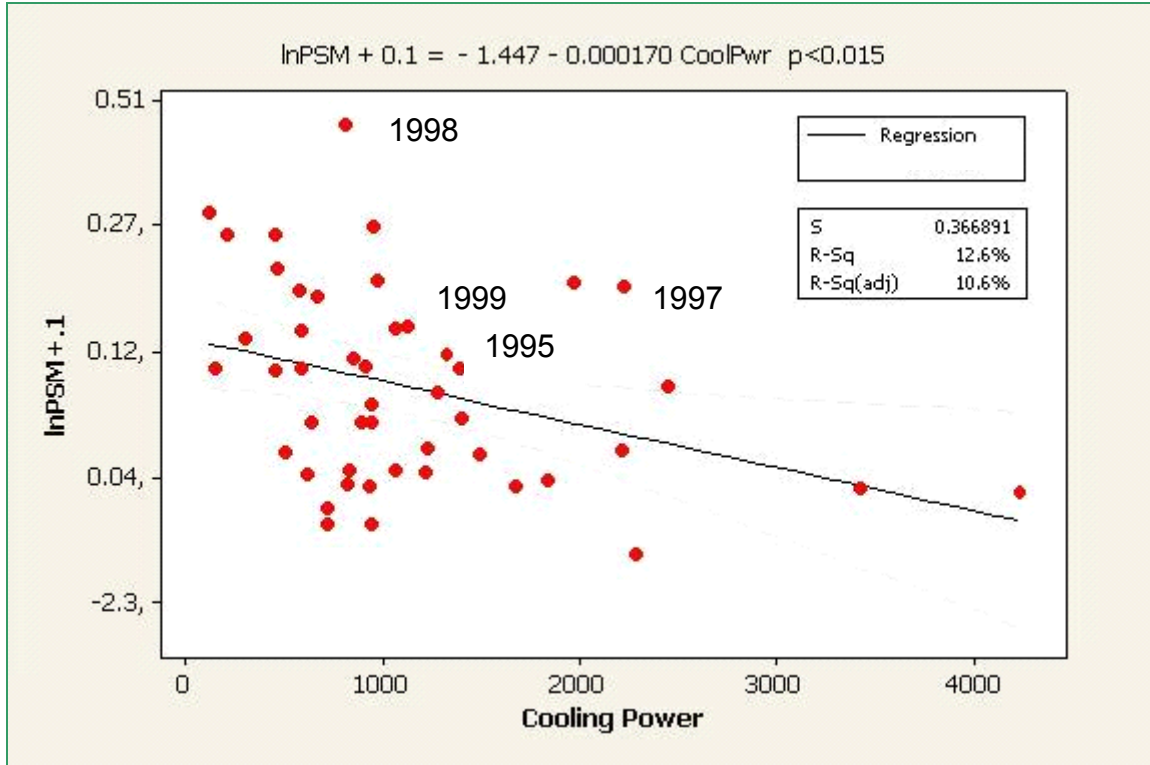


Figure 12: Annual cooling power of the Nechako at Finmoore (equation 3) as a predictor of pre-spawn mortality (PSM) among Early Stuart sockeye between 1952 and 2003. Data points are identified for select years. PSM values are  $\ln+0.1$  transformed to remove the tendency for PSM to vary with the mean and to provide a linear rendition of the data. The regression equation, p-value and  $R^2$  are provided.

## DISCUSSION

The Summer Temperature Management Program (STMP) is the only component of the annual activity of the Nechako Fisheries Conservation Program directed at the protection and conservation of sockeye salmon (NFCP 2005). When the STMP temperature target was established, there was no requirement to assess its efficacy in terms of temperatures realized or benefits to sockeye salmon. In addition to the obvious interest in conducting such an assessment, recent interest in altering water release timing to enhance other species (e.g. sturgeon – Korman and Walters 2001) provides additional incentive (NFCP 2005). Water temperature in the Nechako River above the confluence of the Stuart has rarely exceeded the 1987 Settlement Agreement target of 20°C despite a warming summer trend during the last six decades (Fig.4). However, proof that the expenditure of considerable volumes of water (approximately 15.8 m<sup>3</sup>/s annualized average since 1987) actually supports STMP objectives is based on theoretical approaches with mathematical energy balance models (Triton 2004). Our study, using empirical data, provided independent support for the conclusions reached with these models; increased water volume retards the rate at which water temperature increases as it proceeds downstream. Minimum flow regimes have been used to mitigate against high summer temperatures in other locations (Gu et al. 1998; Sinokrot and Gulliver 2000). The rate at which water in a river will respond to atmospheric conditions depends, in part, on the ratio of its surface area to its volume. In most rivers there is a



non-linear relationship between width and flow in the form of  $w = aQ^b$  with  $b$  less than 1. Thus an increase in river discharge is accompanied with a slower increase in surface area exposed to the atmosphere (Foreman et al. 1997) and is therefore less responsive to the warming effects from atmospheric (Ward 1982) or groundwater input (Webb 1995). As stated by Hockey et al. (1982), and Poole and Bergman (2001), water temperature is a function of heat load divided by discharge; a relationship that is largely responsible for the success of the STMP in meeting temperature targets at Finmoore.

Numerous studies have shown hypolimnetic reservoir drawdown to reduce down-stream temperatures in the summer (Paller and Saul 1996; Flodmark et al. 2004). However, in the Nechako, if the existing temperature targets can be met using lower release volumes of cooler water from Kenney Dam, failure to consider the volume of the Nechako at the confluence of the Stuart and the subsequent cooling effect that results in most summers to the warmest portion of the migration path, could result in warmer migration conditions for the Early Stuart sockeye in the Nechako downstream of the confluence (IPSFC 1979). During the three or four days that sockeye salmon spend in the lower Nechako River, they are frequently exposed to temperature in excess of 20°C. These temperatures, have been cited as lethal thresholds for salmon (Brett 1952; Bouck et al. 1975), creating impediments to migration (Cooper and Henry 1962; Major and Migell 1966; Keefer et al. 2004; Salinger and Anderson 2006), reducing swimming performance by depleting energy and promoting exhaustion (Gilhousen 1980, Rand and Hinch 1998), and can elicit immunosuppression and disease development (Anderson 1990; Schreck et al. 2001). The incidence, development rate and virulence of bacterial and parasitic infection in salmon are positively associated with temperature (Williams 1973; Williams et al. 1977). Infection severity by the myxosporean parasite *Parvicapsula minibicornus*, which has been identified as a contributing factor in the freshwater en route loss of Fraser sockeye (St-Hilaire et al. 2001), increases with freshwater exposure and temperature. A positive feedback mechanism exists where factors that adversely affect critical sockeye swimming performance (Jain et al. 1998, Wagner et al. 2005), extend freshwater residency creating further stress. This feedback exacerbates the problem and ultimately can compromise the fitness of the entire stock (Wedemeyer 1970). Furthermore temperature effects are not limited to fish biota. Increased stream temperatures can reduce the abundance of mayfly larvae (Brittain and Saltveit 1989) and shift invertebrate communities and emergence times, and alter abundance and diversity (Fraleigh 1979).

High migration temperature and infection severity has been cited as a cause for pre-spawn mortality (PSM) in many stocks of Fraser sockeye (Gilhousen 1990, Macdonald et al. 2000a). In Gilhousen's analysis, fish infected with pathogens from resident species in the lower portion of the river and/or adjacent marine coastal zones (Colgrove and Wood 1966, Williams et al. 1977), suffer elevated PSM when exposed to warm water temperatures during their subsequent migration. Warm water temperatures have also been associated with high rates of PSM by Becker and Fujihara, (1978), Traxler et al. (1998) and Quinn et al. (2007). Positive correlations among PSM in Early Stuart sockeye, the cooling power of the Nechako at Finmoore and the temperatures in the downstream migration corridor are consistent with the preceding evidence. We speculate that the warmest temperatures encountered during migration (Stuart/Nechako corridor) are the most critical for successful spawning and most deserving of temperature management. However, Nechako cooling power estimates did not correlate well with temperatures in other reaches of the Fraser River (i.e. Hells Gate, their spawning grounds) where temperature during Early Stuart migration has also been

correlated to PSM (Gilhousen 1990, Macdonald et al. 2000a). This apparent contradiction, and the degree of uncertainty in the influence of cooling power on PSM (Fig. 11), limits the use of the cooling power equation in combination with cooling control releases from Skins Spillway as a fishery management tool to compensate for losses to production. We conclude, as did Gilhousen (1990), that PSM cannot be attributed to a single environmental factor and require databases of greater duration and complexity for a more complete analysis.

A cold water release facility may open up new management options to manage flow and temperature for sockeye, sturgeon and other biota while giving greater flexibility to address other social, environmental and economic interests. For example, water quantity savings during the summer could be redirected to create a more natural spring freshet for sturgeon recovery efforts (McAdam et al. 2005) or augment flows for other purposes at other times of year including the production of hydro-electric energy. Recently, a water-use needs exercise was initiated in the Nechako watershed to seek a compromise among the many public and commercial stakeholders. A model was used to collate and integrate each users requirement to seek an annual water release solution(s) (N-DAM, Bouillon 2004). For the purposes of protecting sockeye salmon stocks, our analysis suggests that over 100cms of 12°C or 125cms of 14°C water is needed during the current temperature control period, which is considerably less than the range of STMP release rates of 158 to 213 cms since 1981. However, these estimates do not consider the importance of large water volumes for the purposes of cooling the Stuart/Nechako confluence and resisting water heating as it continues through the lower Nechako during the sockeye migration. Nor do they consider future climate change impacts. Future temperature target models should perhaps consider the influence of the Stuart River during the period that the Early Stuart run is in the Stuart/Nechako corridor and incorporate the flexibility necessary to address climate change impacts in the Fraser Basin (Morrison et al. 2002). However, the inclusion of unregulated tributaries (e.g. the Stuart) into the modelling and summer temperature management exercises could increase model complexity and the degree of management uncertainty.

Paradoxically, the use of a cold water release facility at Kenney Dam to avoid lethally high temperature thresholds at Finmoore and sites further downstream, could potentially lower temperature in the upper Nechako to suboptimum or even lethal levels. Populations of rainbow trout (*Oncorhynchus mykiss*), bull trout (*Salvelinus confluentus*), mountain whitefish (*Prosopium williamsoni*), northern pikeminnows (*Ptychocheilus oregonensis*) and other fish species resident to the upper Nechako watershed (Brown 1995) are likely able to cope with gradual temperature change within their thermal histories and tolerances. However, the term cold shock stress has been used to describe the response to large, rapid reductions in temperature relative to thermal tolerance limits as might be expected should cold water releases be used as a component of a future Nechako River flow regime (Crawshaw 1977; Van Den Burg et al. 2005). Cold shock stress has been associated with a variety of lethal and sublethal effects in a variety of fish species. Rapid temperature reduction has elicited primary stress response as indicated by elevated plasma cortisol, in both rainbow trout (*O. mykiss*) (Barton and Peter 1982) and brown trout (*Salmo trutta*) (Hyvarinen et al. 2004), secondary stress response as indicated by blood lactate, glucose and osmoregulatory changes in Atlantic salmon (*Salmon salar*) (Galloway and Kieffer 2003) and rainbow trout (Reaves et al. 1968), and tertiary stress response such as reduced development rate (Hubert and Gern 1995), susceptibility to pathogens (Tierney et al. 2004), loss of

equilibrium in juveniles (Clarkson and Childs 2000) and greater susceptibility to predation (Fuiman 1991). Rapidly fluctuating temperatures are considered stressful to much of the zoobenthos and fish below a dam on the Flathead River (Stanford and Hauer 1992). Much of the cold shock field research has focussed on thermal power plant effluent where the cold shock occurs during plant shutdown causing temperatures to return, often unpredictably, to ambient conditions. A cold water release structure at the Kenney Dam may operate with large and rapid temperature fluctuations much as currently occurs with flows, or it may operate more predictably and provide an opportunity to mitigate the rates and the degree of temperature alteration. However, literature related to the operation of cold water release facilities, their impact downstream as well as to the reservoir itself, is sparse. The forgoing citations deal with the influence of rapid temperature fluctuations on the individual whereas more investigation is required to understand ecosystem and population level impacts (Donaldson et al. submitted).

Construction of a cold water release facility at the Kenney Dam may have many benefits beyond the ability to control outlet water temperature. In particular, during the STMP period, short-term spills can range from 14.2 - 538cms causing severe habitat alteration. Channels have widened and fine substrates have been lost, lakes have silted and water quality has declined (BCUC 1994). Therefore, diversion of water from Skins Spillway through the historic Nechako River reach below the Kenney Dam may provide restoration opportunities in the Murray-Cheslatta watershed (BCUC 1994). In addition, releasing water through the Kenney Dam facility directly to the Nechako avoids the capacitance effect experienced when water released from the Skins spillway must first pass through the Cheslatta system. Consequently, release response efficiency to meteorological forecasts is likely to increase and water savings will likely accrue. For instance, water dedicated to surcharging the Cheslatta system during start-up of the STMP operations (usually between July 10<sup>th</sup> -19<sup>th</sup>), often creates unnecessarily large flows if early summer temperatures are below normal (e.g. 1992, Triton 1995).

While water release facilities at Kenney Dam may have many positive environmental benefits, the release of large volumes of water to maintain temperatures during the salmon migration period is a proven management principle. Currently, temperature targets above the confluence of the Stuart River could be achieved with a reduction of water released at below ambient temperatures. However, with anticipated atmospheric warming and the tendency of reduced volumes of water to warm more quickly when exposed to solar radiation and other atmospheric conditions, the water savings will be modest. Furthermore, when considering of the influence of Stuart River conditions on the lower Nechako River, reduced flows at Finmoore may result in warming of the salmon migration corridor, while temperatures in the upper reaches river are cooled to suboptimal levels. Temperature control may have positive benefits but should be evaluated in context with broader interests and in conjunction with reconsideration of the entire Nechako summer temperature management plan.

## ACKNOWLEDGEMENTS

We wish to thank staff of the Triton Environmental Consultants, Alcan Inc. and Fisheries and Oceans Canada for providing data and a critical review of the concepts developed in this manuscript. Of particular significance was the insight provided by Mr. Jason Hwang, Mr. Dave Innell, Mr. Ken Smith and Mr. Byron Nutton. Dr. Mike Bradford was also consulted during the model development phase of this work and provided insight into the development of the cooling power concept. Thanks are also extended to Mr. Keith Clarke for providing us with an unpublished document reviewing pertinent literature that assisted us in providing complete coverage of a wide range of flow management topics. Ms. Beth Piercey assisted with the editing. This research was supported by funds from the Habitat and Enhancement Branch of the Fisheries and Oceans Canada.

## LITERATURE CITED

- Anderson, D. P. 1990. Immunological indicators: effects of environmental stress on immune protection and disease outbreaks. *Am. Fish. Soc. Symp.* 8: 38-50.
- Barton, B.A. and Peter, R.E. 1982. Plasma cortisol stress response in fingerling rainbow trout, *Salmon gairdneri* Richardson, to various transport conditions, anaesthesia, cold shock. *J. Fish Biol.* 20, 29-51.
- BCUC. 1994. Kemano Completion Project Review: Report and Recommendations to the Lieutenant Governor in Council. British Columbia Utilities Commission, Vancouver, B.C. 260pp. with appendices.
- Becker, C.D., and Fujihara, M.P. 1978. The bacterial pathogen *Flexibacter columnaris* and its epizootiology among Columbia River fish. *Am. Fish. Soc. Monog.* 2.
- Bouillon, D. 2004. N-Dam simulation results. For Nechako Watershed Council – unpublished. p. 34.
- Bouck, G.J., Chapman, G.A., Schneider, P.W., Jr., and Stevens, D.G. 1975. Effects of holding temperature on reproductive development in adult sockeye salmon (*Oncorhynchus nerka*). Annual Northwest Fish Culture conference, 3-5 December, 1975, Otter Rock, Oreg. pp. 24-40.
- Boudreau, K. 2004. Nechako watershed council report: Assessment of potential flow regimes for the Nechako watershed. Internal Discussion Paper to the Nechako Watershed Council. 4 Thought Solutions Inc. 70p.
- Brett, J.R. 1952. Temperature tolerance in young Pacific salmon, genus *Oncorhynchus*. *J. Fish. Res. Board Can.* 9: 265-323.
- Brittain, J.E. and Saltveit, J. 1989. A review of the effect of river regulation on mayflies (Ephemeroptera). *Regul. Rivers: Res. Manage.* 3: 191-204.
- Brown, T.G. 1995. Stomach contents, distribution and potential of fish predators to consume juvenile Chinook salmon in the Nechako and Stuart rivers, B.C. *Can. Tech. Rep. Fish Aquat. Sci.* 2077: 39 p.

- Clarkson, R.W., and Childs, M.R. 2000. Temperature effects of hypolimnial-release dams on early life stages of Colorado River basin big-river fishes. *Copeia* 2: 402-412.
- Colgrove, D.J. and Wood, J.W. 1966. Occurrence and control of *Chondrococcus columnaris* as related to Fraser River sockeye salmon. *Int. Pac. Salmon Fish. Comm. Prog. Rept. No. 15*.
- Cooke S. J., Hinch, S. G., Farrell, A. P., Jones S., Macdonald, J. S., Patterson, D.A., Lapointe, M., Healey, M.C., Van der Kraak, G. 2004. Abnormal migration timing and high enroute mortality of sockeye salmon in the Fraser River, British Columbia. *Fisheries* 29: 22-33.
- Cooper, A.C., and Henry, K.A. 1962. The history of the Early Stuart sockeye run. *Int. Pac. Salmon Fish. Comm. Prog. Rep. No. 10*.
- COSEWIC (Committee on the Status of Endangered Wildlife in Canada). 2003. Assessment and update status report on the white sturgeon (*Acipenser transmontaneus*) in Canada. Available: [http://www.sararegistry.gc.ca/virtual\\_sara/files/cosewic/sr%5Fsturgeon%5Ffe%2Epdf](http://www.sararegistry.gc.ca/virtual_sara/files/cosewic/sr%5Fsturgeon%5Ffe%2Epdf). (August 2004)
- Coutant, C. 2004. A riparian habitat hypothesis for successful reproduction of white sturgeon. *Rev. Fish. Sci.* 12:23-73.
- Crawshaw, L.I. 1977. Physiological and behavioural reactions of fishes to temperature change. *J. Fish. Res. Bd. Can.* 34: 730-734.
- Donaldson, M.R. Cooke, S.J., Patterson, D.A. and Macdonald, J.S.. submitted. Cold shock and fish: Consequences, Applications, and research Opportunities. *J. Fish. Biol.*
- Draper, N. and Smith, H. 1981. *Applies Regression Analysis*, second edition. John Wiley and Son, New York. 709 p.
- Dynesuis, M. and Nilsson, C. 1994. Fragmentation and flow regulation of river systems in the northern third of the world. *Science* 266:753-762.
- Edinger, J. E., Brady, D. K., and Graves, W. L. 1968. The variation of water temperatures due to steam electric cooling operations. *J. Water Pollut. Contr. Fed* 40(9):1632-1939.
- Flodmark, L.E.W., Vollestad, L.A., and Forseth, T. 2004. Performance of juvenile brown trout exposed to fluctuating water level and temperature. *J. Fish. Biol.* 65: 460-470.
- Foreman, M.G.G., James, B. Quick, M.C., Hollemans, P. and Wiebe, E. 1997. Flow and temperature models for the Fraser and Thompson Rivers. *Atmosphere-Oceans*, 35(1), 109-134.

- Fraleay, J.J. 1979. Effects of elevated stream temperatures below a shallow reservoir on cold-water macroinvertebrate fauna. In Ward, J.V. and Stanford, J.A. (eds.), *The Ecology of Regulated Streams*. Plenum Press: New York. p. 257-272.
- Fuiman, L.A. 1991. Influence of temperature on evasive responses of Atlantic herring larvae attacked by yearling herring, *Clupea harengus L.* *J. Fish Biol.* 39: 93-102.
- Galloway, B.J. and Kieffer, J.D. 2003. The effects of an acute temperature change on the metabolic recovery from exhaustive exercise in juvenile Atlantic salmon (*Salmo salar*). *Physiol. Biochem. Zool.* 76: 652-662.
- Gilhousen, P. 1980. Energy sources and expenditures in Fraser River sockeye salmon during their spawning migration. *Int. Pac. Salmon Fish. Comm. Bull. No. 22:* 51p.
- Gilhousen, P. 1990. Prespawning mortalities of sockeye salmon in the Fraser River system and possible causal factors. *Int. Pac. Salmon Fish. Comm. Bull. 26:* 58 p.
- Green, R.H. 1979. *Sampling design and statistical methods for environmental biologist*. John Wiley and Sons, Toronto, Ont. 257p.
- Groot, C. and Margolis, L. 1991. *Pacific Salmon Life Histories*. UBC Press Vancouver. 563 p.
- Gu, R., Montgomery, S., and Austin, T. 1998. Quantifying the effect of stream discharge on summer river temperature. *J. Hydrol. Sci.* 43: 885-904.
- Hill, R.A., and Irvine, J.R. 2001. Standardizing spawner escapement data: a case study of the Nechako River chinook salmon. *N. Am.J. Fish. Manage.* 21(3):651-655.
- Hockey, J.B., Owens, I.F., and Tapper, N.J. 1982. Empirical and theoretical models to isolate the effect of discharge on summer water temperatures in the Hurunue River. *J. Hydrology New Zealand.* 21: 1-12.
- Hyatt, K.D., Stockwell, M.M. and Rankin, D.P. 2003. Impact and adaptation responses of Okanagan River sockeye salmon (*Oncorhynchus nerka*) to climate variation and change effects during freshwater migration: stock restoration and fisheries management implications. *Can. Water Res. J.* 28: 689-713.
- HYDAT. 2003. <http://www.wsc.ec.gc.ca/hydat/H2O/>.
- Hubert, W.A. and Gern, W.A. 1995. Influence of embryonic stage on survival of cutthroat trout exposed to temperature reduction. *Prog. Fish Cult.* 57: 326-328.
- Hyvarinen, P., Heinimaa, S. and Rita H. 2004. Effects of abrupt cold shock on stress responses and recovery in brown trout exhausted by swimming. *J. Fish Biol.* 64: 1015-1026.
- Jain, K.E., Birtwell, I.K., and Farrell, A.P. 1998. Repeat swimming performance of mature sockeye salmon following a brief recovery period: a proposed measure of fish health and water quality. *Can. J. Zool.* 76: 1-9.

- IPSFC. 1979. Salmon studies associated with the potential Kemano II hydroelectric development. Volume 2. Sockeye salmon studies on the Nechako River. International Pacific Salmon Fisheries Commission, New Westminster, B.C. 99p.
- Keefer, M.L., Peery, C.A., Bjornn, T.C., Jepson, M.A., and Stuehrenberg, L.C. 2004. Hydrosystem, dam, and reservoir passage rates of adult Chinook salmon and steelhead in the Columbia and Snake Rivers. *Trans. Am. Fish. Soc.* 133: 1413-1439.
- Korman, J. and Walters, C.. 2001. Nechako River White Sturgeon recovery planning: summary of stock assessment. Oct. 2-3 workshop. Report by Ecometric Research for the British Columbia Ministry of Water Land and Air Protection, Victoria.
- Macdonald, J.S., Foreman M.G.G., Farrell, T., Williams, I.V., Grout, J., Cass, A., Woodey, J. C., Enzenhofer, H., Clarke, W.C., Houtman, R., Donaldson, E.M., Barnes, D. 2000a. The influence of extreme water temperatures on migrating Fraser River sockeye salmon during the 1998 spawning season. *Can. Tech. Rep. Fish. Aquat. Sci.* 2326, 117 p.
- Macdonald, J.S., Williams, I.V., and Woodey, J.C.. 2000b. The effects of in-river conditions on migrating sockeye salmon (*Oncorhynchus nerka*). *In* Mortality during the migration of Fraser River sockeye salmon: A study of the effect of ocean and river environmental conditions in 1997. *Edited by* J.S. Macdonald. *Can. Tech. Rep. Fish. Aquat. Sci.* 2315:120 p.
- McAdam, S., Walters C., and Nistor, C. 2005. Linkages between White Sturgeon recruitment and altered bed substrates in the Nechako River, Canada. *Trans Am. Fish. Soc.* 134: 1448-1456.
- Major, R.L., and Mighell, J.L. 1966. Influence of Rocky Reach Dam and the temperature of the Okanagan River on the upstream migration of sockeye salmon. *Fish. Bull.* 66: 131-147.
- Morrison, J., and Foreman, M. G. G. 1998. Sensitivity analyses and modifications to the IOS river temperature model. *Can. Tech. Rep. Fish. Aquat. Sci.* 2224.
- Morrison, J., Quick, M.C., Foreman, M.G.G. 2002. Climate change in the Fraser River watershed: flow and temperature projections. *J. Hydrology.*, 263: 230-244.
- Morrison, J. 2005. Fraser River temperature and discharge forecasting: 2004 Review. *Can. Tech. Rep. Fish. Aquat. Sci.* 2594: iv + 16 p.
- Nelson, W.A., Levings, C.D., and Paul, A.J. 2007. Population growth and demography of white sturgeon in the lower Fraser River. *Am. Fish. Soc. Symposium.* 56: 381-396.
- Nechako Fisheries Conservation Program technical data review 1988-2002. p. 319.

- Patterson, D.A., Skibo, K.M., Barnes, D.P., Hills, J.A., and Macdonald, J.S. 2007a. The influence of water temperature on time to surface for adult sockeye salmon carcasses and the implication is estimating salmon carcasses in the Fraser River, British Columbia. *N. Am. J. Fish. Manage.* 27: 878-884
- Patterson, D.A., Macdonald, J. S, Skibo, K.M., Barnes, D., Guthrie, I., and Hills, J. 2007b. Reconstructing the summer thermal history for the lower Fraser River, 1941 to 2006, and implications for adult sockeye salmon (*Oncorhynchus nerka*) during spawning migration. *Can. Tech. Rep. Fish. Aquat. Sci.* 2724: iiv+43p.
- Paller, M.H., and Saul, B.M. 1996. Effects of temperature gradients resulting from reservoir discharge on *Dorosoma cepedianum* spawning in the Savannah River. *Environ. Biol. Fish.* 45: 151-160.
- Poole, G.C., and Berman, C.H. 2001. An ecological perspective on in-stream temperature: Natural heat dynamics and mechanisms of human-caused thermal degradation. *Environ. Manage.* 27(6): 787-802.
- Quinn, T.P., Hodgson, S., and Peven, C. 1997. Temperature, flow, and the migration of adult Sockeye Salmon (*Oncorhynchus nerka*) in the Columbia River. *Can. J. Fish. Aquat. Sci.* 54: 1349-1360.
- Quinn, T.P., Eggers, D.M., Clark, J.H., and Rich Jr., H.B. 2007. Density, climate, and the process of prespawning mortality and egg retention in Pacific salmon (*Oncorhynchus spp.*). *Can. J. Fish. Aquat. Sci.* 64: 574-582.
- Rand, P.S., and Hinch, S.G. 1998. Swim speeds and energy use of upriver-migrating sockeye salmon (*Oncorhynchus nerka*): simulating metabolic power and assessing risk of energy depletion. *Can. J. Fish. Aquat. Sci.* 55: 1832-1841.
- Reaves, R.S., Houston, A.H. and Madden, J.A. 1968. Environmental temperature and the body fluid system of fresh-water teleosts – II. Ionic regulation in rainbow trout, *Salmo gairdneri*, following abrupt thermal shock. *Comp. Biochem. Physiol.* 25: 849-860.
- Salinger, D.H. and Anderson, J.J. 2006. Effects of water temperature and flow on adult salmon migration swim speed and delay. *Trans. Am. Fish. Soc.* 135: 188-199.
- Schreck, C.B., W. Contreras-Sanchez, and M.S. Fitzpatrick. 2001. Effects of stress on fish reproduction, gamete quality, and progeny. *Aquaculture.* 197: 3-24.
- Sinokrot, B. and Gulliver, J.S. 2000. In-stream flow impact on river water temperatures. *J. Hydraulic Res.* 38(5): 339-350.
- Stanford, J.A. and Hauer, F.R. 1992. Mitigating the impacts of stream and lake regulation in the Flathead River catchment, Montana, USA: An ecosystem perspective. *Aquat. Conserv. Mar. Freshwat. Eco.* 2: 35-63.
- St-Hilaire S, Boichuk M, Barnes D, Higgins M, Devlin R, Withler R, Khattra J, Jones S, Kieser D. 2001. Epizootiology of *Parvicapsula minibicornis* in Fraser River sockeye salmon, *Oncorhynchus nerka* (Walbaum). *J. Fish Dis.* 25:107-120.



- Tierney, K.B., Stockner, E. and Kennedy, C.J. 2004. Changes in immunological parameters and disease resistance in juvenile coho salmon (*Oncorhynchus kisutch*) in response to dehydroabietic acid exposure under varying thermal conditions. *Water Qual. Res.J. Can.* 39, 175- 182.
- Triton Environmental Consultants Ltd. 1995. The 1992 summer water temperature and flow management project. Nechako Fisheries Conservation Program Technical Report No. RM92-2. 13pp. with appendices.
- Traxler, G.S., Richard, J., and McDonald, T.E. 1998. *Ichthyophthirius multifiliis* (Ich) epizootics in spawning sockeye salmon in British Columbia. *Can. J. Aquat. Anim. Health.* 10: 143-151.
- Triton Environmental Consultants Ltd. 2004. Nechako River temperature modelling in support of migrating sockeye salmon risk assessment. Report 3516/WP9895. 8pp. with appendices.
- Van den Berg, E.H. Peeters, R.R. Verhoye, M., Meek, J. Flik, G. and Van der Linden, A. 2005. Brain responses to ambient temperature fluctuations in fish: Reduction of blood volume and initiation of whole body stress response. *J. Neurophysiology* 93, 2849-2855.
- Wagner G.N., Lotto, A., Kuchel, L., Jones, S.R.M., Patterson, D.A., Cooke, S.J., Macdonald, J.S., Van Der Kraak, G., Healey, M.C., Shrimpton, J.M, English, K.K., Hinch, S.G., Farrell, A.P. 2005. Metabolic rates and swimming performance of adult Fraser sockeye salmon (*Oncorhynchus nerka*) after controlled exposure with *Parvicapsula minibicornis*. *Can. J. Fish Aquat. Sci.* 62: 2124-2133.
- Ward, J.V. 1982. Ecological aspects of stream regulation: Responses in downstream lotic reaches. *Water Pollut. Manage. Rev.* 2: 1-26.
- Ward, J.V., and Stanford, J.A. 1987. The ecology of regulated streams: Past accomplishments and directions for future research. In Craig, J.F., and Kemper, J.B. (eds.). *Regulated Streams Advances in Ecology*. Plenum Press: New York. P. 391-409.
- Webb, B.W. 1995. Regulation and thermal regime in a Devon River system. In. Foster I.D.L, Gurnell, A.M., and Webb, B.W. (eds.). *Sediment and water quality in river catchments*. P. 65-94.
- Wedemeyer, G. 1970. The role of stress in the disease resistance of fishes. *In* Symposium on diseases of fish and shellfish. *Edited by* Stanislas F. Snieszko. *Am. Fish. Soc. Spec. Publ.* 5: 30-35.
- Williams, I.V. 1973. Investigations of the pre-spawning mortality of sockeye in Horsefly River and McKinley Creek, 1969. *Int. Pac. Salmon Fish. Comm. Prog. Rep. No.* 27. Part II.

Williams, I.V., Fagerlund, U.H.M., McBride, J.R., Strasdine, G.A., Tsuyuki, H., and Ordal, E.J. 1977. Investigations of pre-spawning mortality of 1973 Horsefly River sockeye salmon. Int. Pac. Salmon Fish. Comm. Prog. Rep. No. 37.

Wunderlick, W. 1972. Heat and mass transport between a water surface and the atmosphere. Water Resor. Res.Rep. 14 (report No. 0-6803), Division of water Control Planning Engineering Laboratory, Tennessee Valley Authority, Norris. Tenn.